

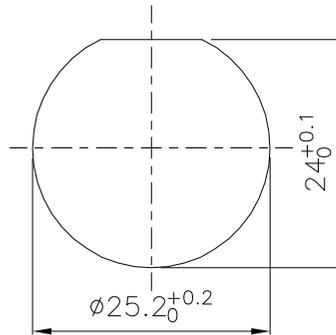
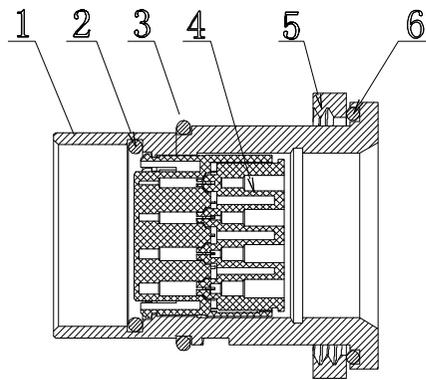
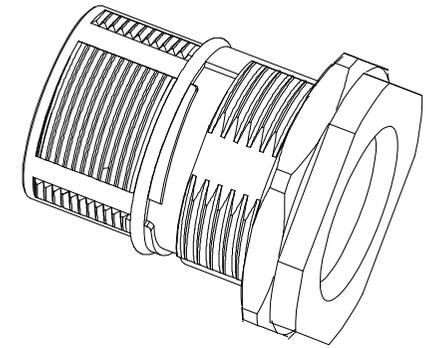
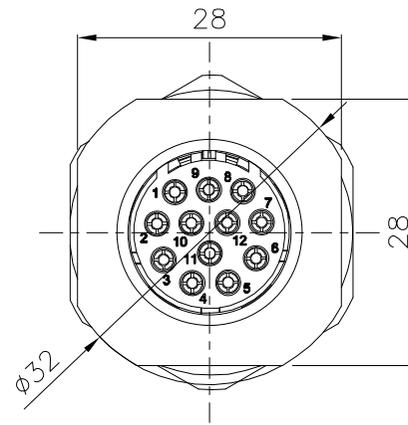


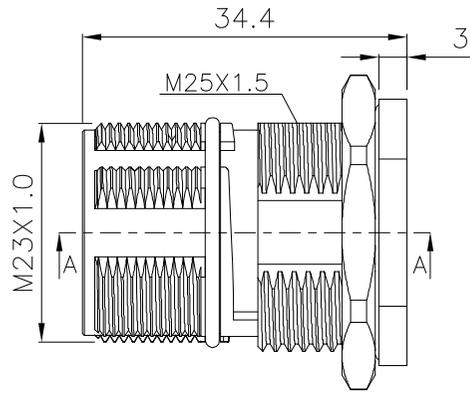


REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Xiong	2024.03.18

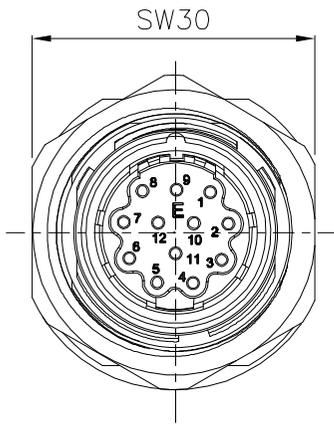

Recommended Panel cut-out

Specification:

- Ingress protection: IP67.
- Operating temperature:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ .
- Mechanical life: 500 cycles.
- Rated voltage: 150V.
- Rated current: 8A.
- Wire gauge range: 16 - 26 AWG.



7	Pin	Copper Alloy; Gold-plated	12
6	O-Ring	Rubber, Black	1
5	Nut	Copper Alloy; Nickel plated	1
4	Housing	Thermoplastic, Nature	1
3	O-Ring	Rubber, Black	1
2	O-Ring	Rubber, Green	1
1	Body	Zinc,nickel plated	12
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED  UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	<b>Buy From Original Factory</b> <a href="http://www.elecbee.com">www.elecbee.com</a>		PART DESCRIPTION: M23 12 Pin Male Connector				
	Appr: Jim Check: Jason Draw: Xiong	P/N: EB-400-4079		Date	Scale	Unit	Rev
			2024.03.18	1:1	MM	R1.0	1/1