




REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024.12.10

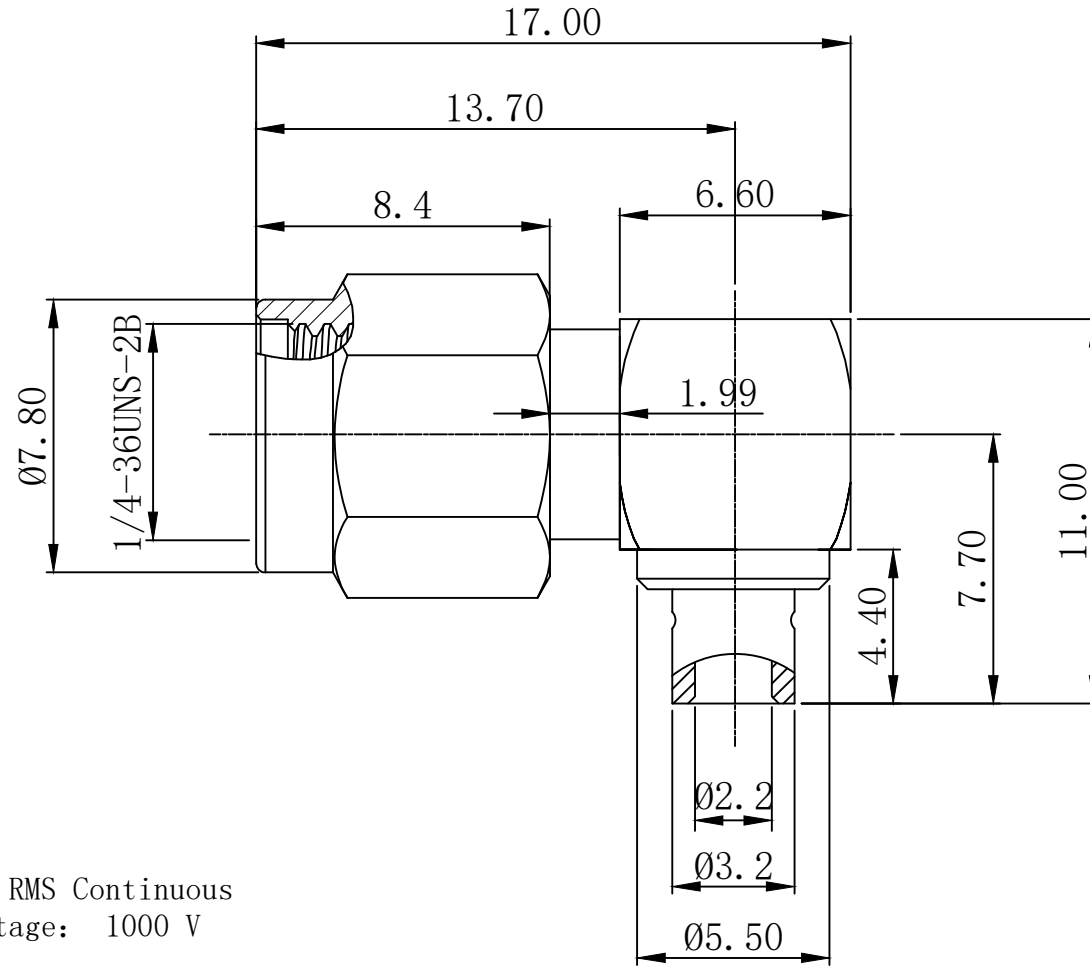

Specifications:

IMPEDANCE: 50 Ohms  
 Frequency range: 0~6GHZ  
 VSWR: 1.5MAX  
 Voltage Rating: 335 Volts RMS Continuous  
 Dielectric withstand voltage: 1000 V  
 Service life:  $\geq 500$   
 Insulation Resistance  $\geq 5000M\Omega$   
 Center contact resistance:  $\leq 3m\Omega$   
 Outer contact resistance:  $\square \leq 2m\Omega$   
 Operation Temperature:  $-55^{\circ}C \sim +165^{\circ}C$

5	Cap	Brass	Gold	1
4	Rubber Mat	Ptfe	None	1
3	Pin	Brass	Gold	1
2	Insulator	Ptfe	None	1
1	Body	Brass	Gold	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	<b>Buy From Original Factory</b> <a href="http://www.elecbee.com">www.elecbee.com</a>				
	PART NAME: SMA R/A plug solder type cable. RG405		P/N: EB-SMA-CS-RA-M-6-033		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm $\pm 0.20mm$ 8 - 30mm $\pm 0.25mm$ 30 - 120mm $\pm 0.30mm$	Appr:	Jim	Date	Scale	Unit
	Check:	Jason	2024.12.10	1:1	MM
	Draw:	Riky	Rev	R1.0	Page