





REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2026.08.05

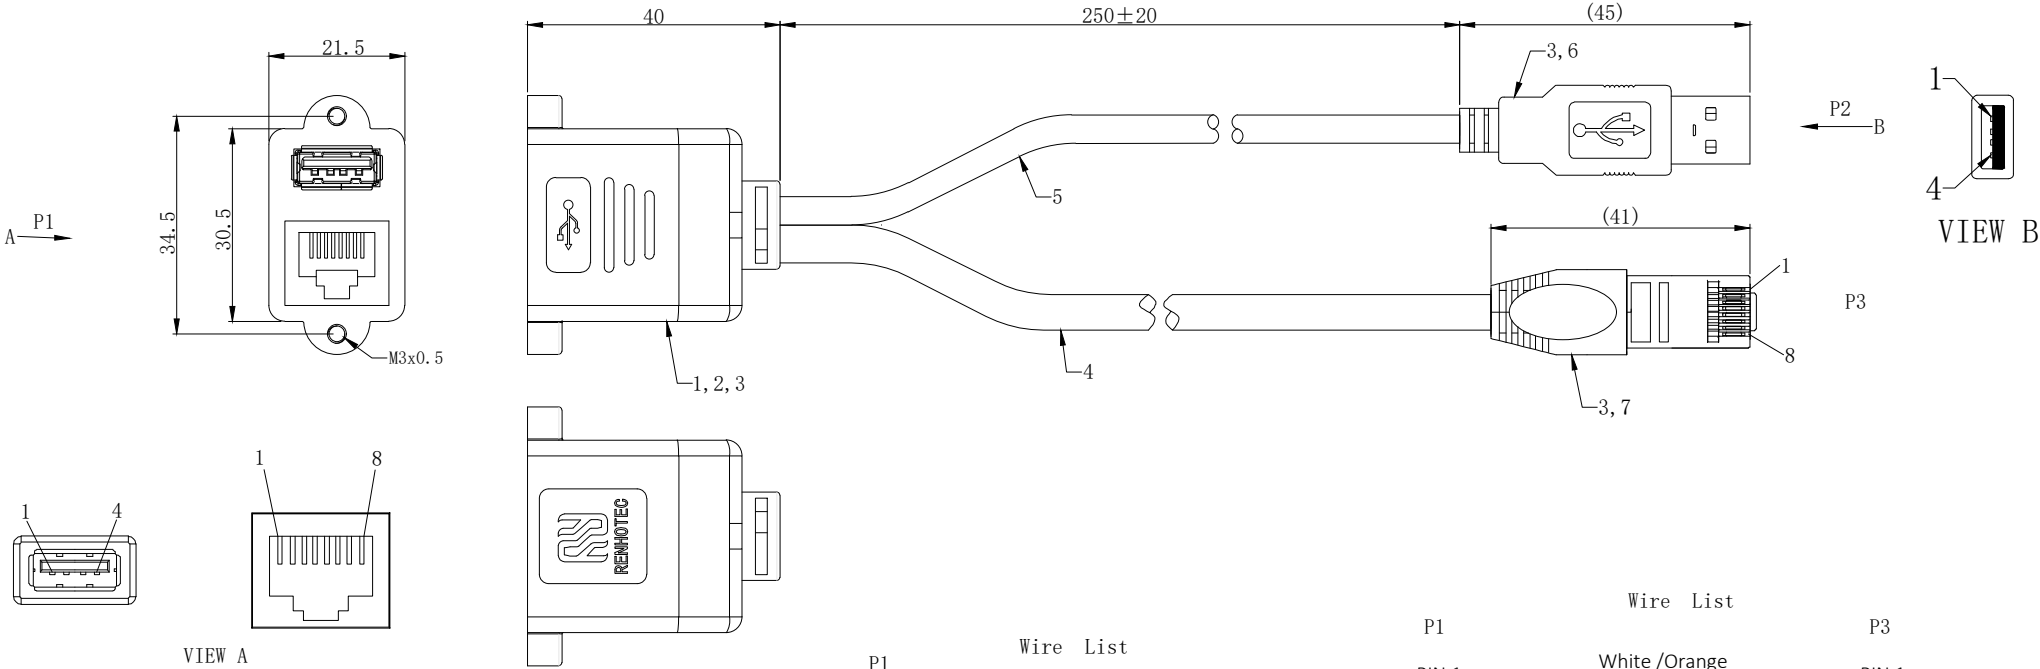

Screw is packed separately in PE bag



P1	Wire List	P2
1	Red	1 VCC
2	White	2 D-
3	Green	3 D+
4	Black	4 GND
Shell	Briad	Shell

P1	Wire List	P3
PIN 1	White /Orange	PIN 1
PIN 2	Orange	PIN 2
PIN 3	White/Green	PIN 3
PIN 6	Green	PIN 6
PIN 7	White /Brown	PIN 7
PIN 8	Brown	PIN 8
PIN 5	White /Blue	PIN 5
PIN 4	Blue	PIN 4
Shell	Drain	Shell

8	Screw	M3*0.5, L=10mm,	2
7	Connector	RJ45 8P8C Male, shielded	1
6	Connector	USB2.0 TYPE A MALE	1
5	Cable	CAT6 FTP (AWG26*1P+AL)*4C+Drain+AL, jacket:PVC, Black, OD6.0mm	1
4	Cable	UL2725 28AWG*1P+AWG24*2C Shield, Jacket:PVC Black, OD:4.5mm	1
3	Overmold	PVC, Black	1
2	Connector	RJ45 8P8C female, shielded	1
1	Connector	USB2.0 TYPE A female, shielded	1
No.	PART NAME	DESCRIPTION	Q' TY

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 -120mm ± 0.30mm

Buy From Original Factory

www.elecbbee.com

PART NAME:
USB A/F+RJ45 female to USB A/M+RJ45 male

P/N:
EB-103-0395

Appr: Jim

Check: Jason

Draw: Riky

Date: 2026.08.05

Scale: 1:1

Unit: MM

Rev: R1.0

Page: 1/1