




| REV  | DESCRIPTION | DRAWING | DATE       |
|------|-------------|---------|------------|
| R1.0 | First issue | Xiong   | 2025.05.14 |

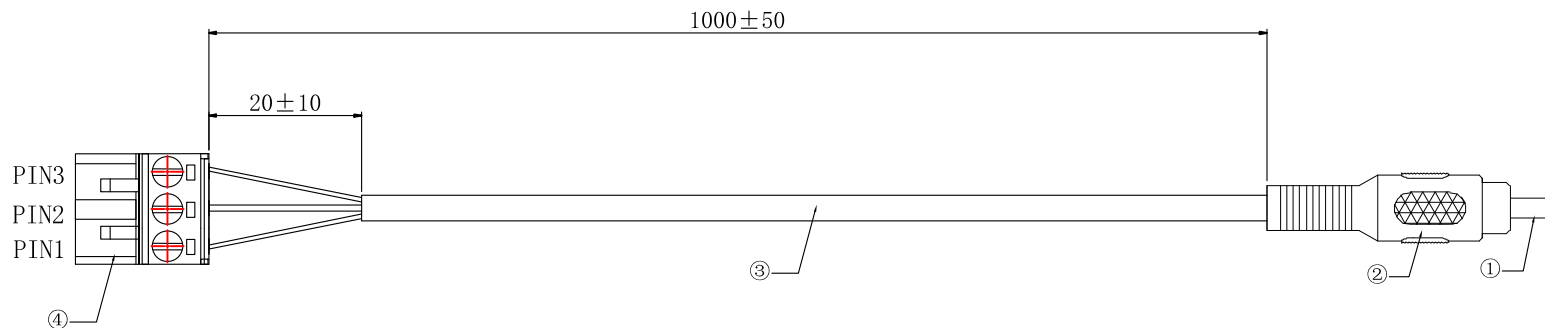

| PIN ASSIGNMENT |       |    |  |
|----------------|-------|----|--|
| P1             |       | P2 |  |
| 1              | Red   | 1  |  |
| 2              | White | 2  |  |
| 3              | Braid |    |  |

#### NOTES:

- PIN ASSIGNMENT SEE TO WIRE LIST
- ELECTRICAL TEST CONDITION:
  - 100%OPEN, SHORT & MISWIRE TEST,
  - INSULATOR RESISTANCE:20 MOHM MIN. DC 300V 0.01SEC
  - CONTACT RESISTANCE:3 OHM MAX.


|    |                       |                                        |     |
|----|-----------------------|----------------------------------------|-----|
| 4  | 3P Female, space 5.08 | PA66 Green+Terminal                    | 1   |
| 3  | Cable                 | UL2547 26AWG*2C+B, PVC Black, OD:3.0mm | 1   |
| 2  | Molding               | PVC Yellow                             | 1   |
| 1  | RCA Male              | Copper, nickel plating                 | 1   |
| NO | DESCRIPTION           | Description                            | QTY |

-TOLERANCES-  
UNLESS OTHERWISE  
SPECIFIED

UNLESS OTHERWISE SPECIFIED  
TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.25mm  
30 -120mm ± 0.30mm



**Buy From Original Factory**  
**www.elecbee.com**



Appr: Jim

Check: Jason

Draw: Xiong

PART DESCRIPTION:  
RCA male connector to 3-core green connector

P/N: EB-102-0043-1

|            |       |      |      |      |
|------------|-------|------|------|------|
| Date       | Scale | Unit | Rev  | Page |
| 2025.05.14 | 1:1   | MM   | R1.0 | 1/1  |