





ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2025/03/06	JIM. KING

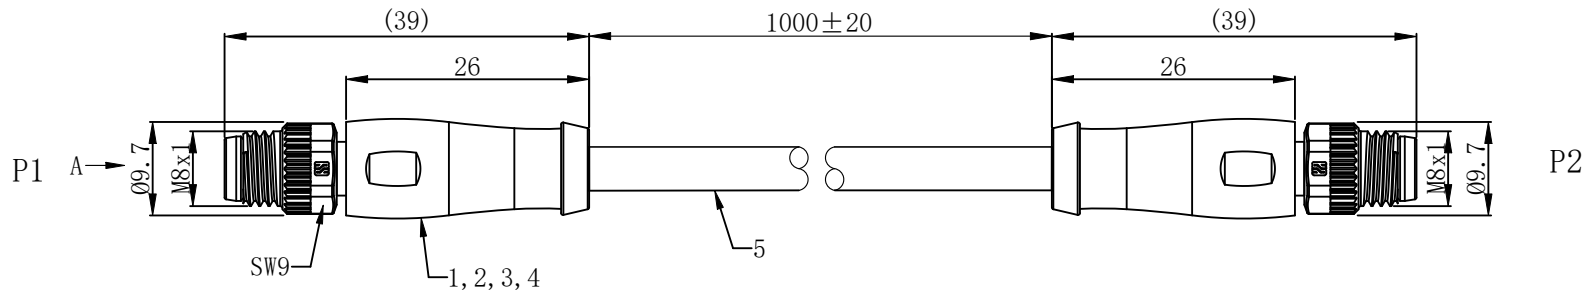


VIEW A

Pin Out		
P1	Wire Color	P2
1	Brown	1
2	White	2
3	Blue	3
4	Black	4

General Specifications

Connector locking system: Screw
Termination: Solder
Temperature range: -20°C ~ +80°C
Mating cycles: > 100
Rated voltage: 50 V AC/60 V DC
Rated current: 3A
Contact resistance: ≤5 mΩ
Insulation resistance: ≥100 MΩ

5	Cable	UL2464 24AWG*4C Jacket:PVC Black	1
4	Molding	PVC, Black	1
3	Screw	Zinc, Nickel Flash	2
2	Contact	Brass, Male Pin,Gold Flash	8
1	Connector	M8 Male 4pin Connector Insert	2
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 RENHOTEC GROUP	
	 PART DESCRIPTION: Double M8 4P Male	
	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	
	Appr: JIM. KING Check: Draw: DING	
P/N: EB-400-1077		Date: 2025.03.06 Scale: Free Unit: MM Type: Z Page: 1/1