




REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2025/02/14	JIM. KING

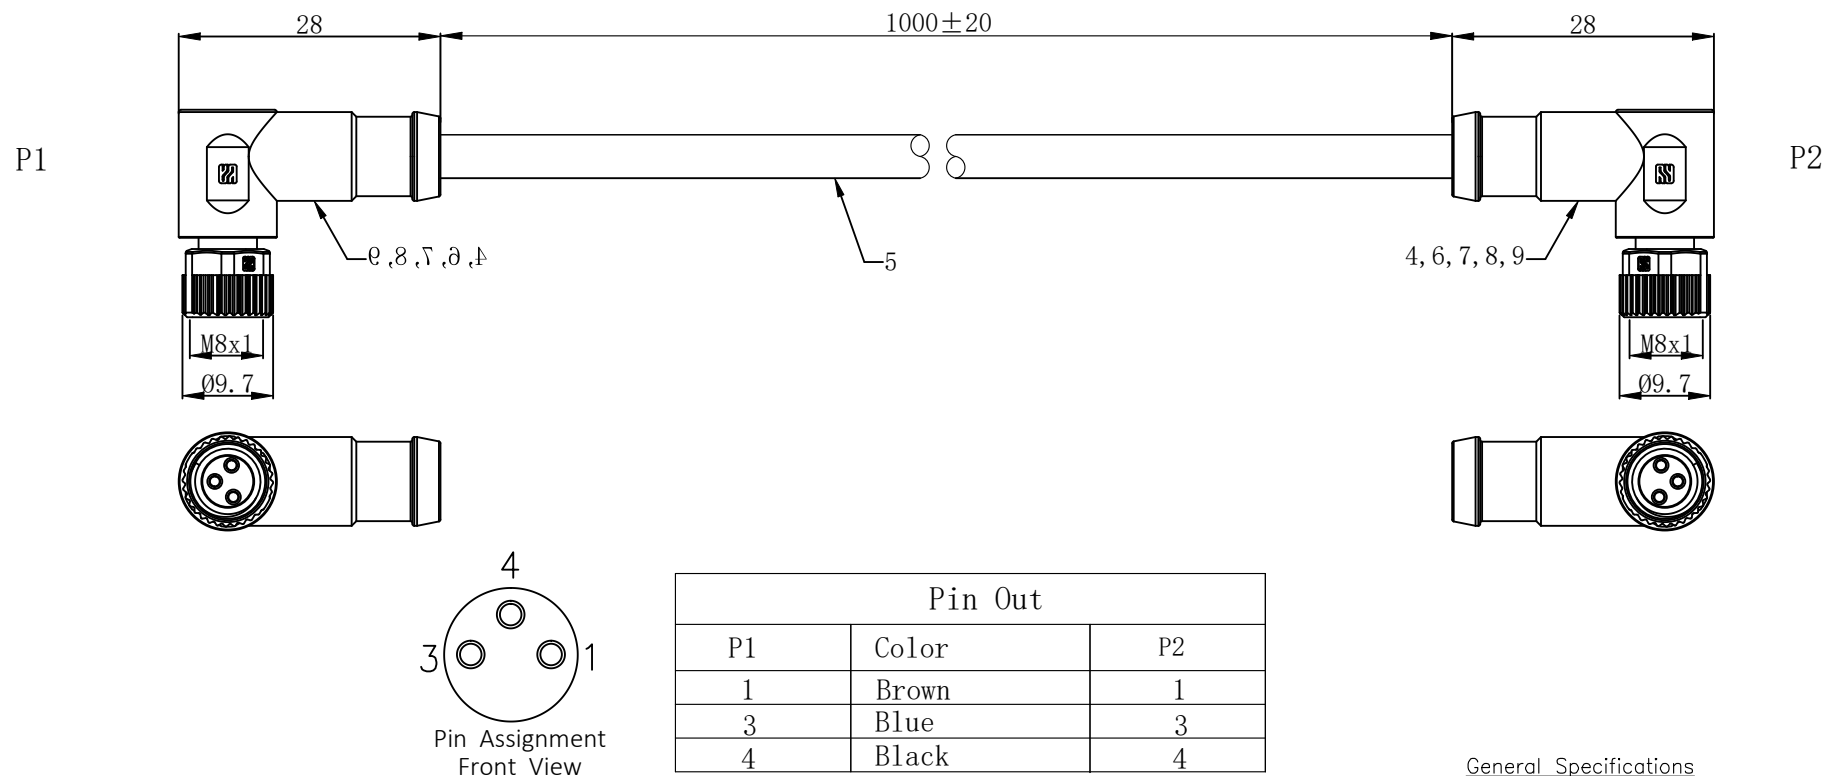

General Specifications


Connector locking system:	Screw
Termination:	Solder
Temperature range:	-20°C ~ +80°C
Mating cycles:	> 100
Rated voltage:	50 V AC/ 60 V DC
Rated current:	3A
Contact resistance:	≤5 mΩ
Insulation resistance:	≥100 MΩ

5	Cable	UL2464 24AWG*3C Jacket:PVC Black	1
4	Molding	PVC, Black	1
3	Ring-Nut	Zinc, Nickel Flash	2
2	Contact	Brass,Gold Flash	6
1	Connector	M8 Female 3pin Connector Insert	2
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED



RENHOTECH GROUP



PART DESCRIPTION:	Double R/A M8 3P Female
-------------------	-------------------------

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:

0.5 - 8mm	± 0.20mm
8 - 30mm	± 0.25mm
30 - 120mm	± 0.30mm

Appr:	JIM. KING
-------	-----------

Check:	
--------	--

Draw:	DING
-------	------

P/N:	EB-400-1078
------	-------------

Date	Scale	Unit	Type	Page
------	-------	------	------	------

2025.02.14	Free	MM	Z	1/1
------------	------	----	---	-----