
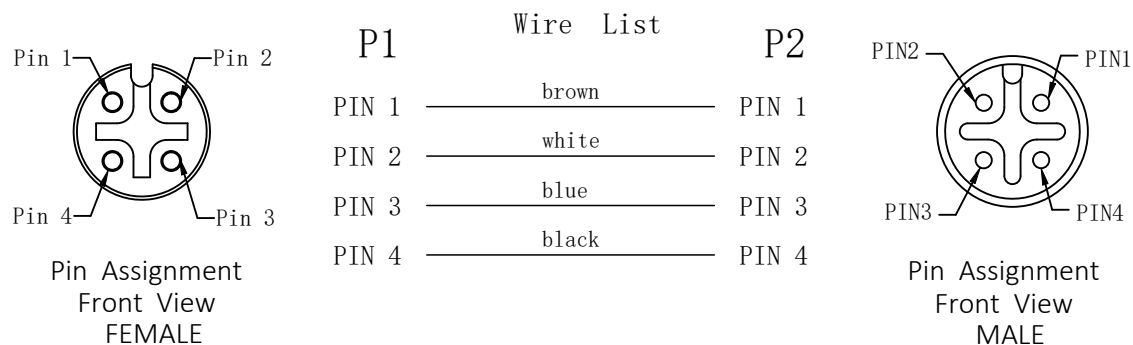




9	Screw	M12*1.0 screw thread, Zinc with nickel plated	1
8	Pin	Brass, Male Pin,Gold Flash	4
7	Connector	M12 Male 4pin Connector Insert	1
6	Cable	UL2464 22AWG*4C,Black PVC Jacket	1
5	Molding	PVC, Black	1
4	Screw nut	Zinc,Nikel Flash	1
3	O-Ring	Rubber, Black	1
2	Contact	Brass, Female Pin,Gold Flash	4
1	Connector	M12 Female 4pin Connector Insert	1
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 RENHOTEC GROUP					
		PART DESCRIPTION: M12 4P Female to Male				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appd: JIM. KING	P/N: EB-400-2029				
	Check:	Date	Scale	Unit	Type	Page
	Draw: Ding	2025.03.06	Free	MM	Z	1/1