





REV	DESCRIPTION	DWN	DATE	APPROVEN
RI.0	First issue	Ding	2025/02/14	JIM.KING

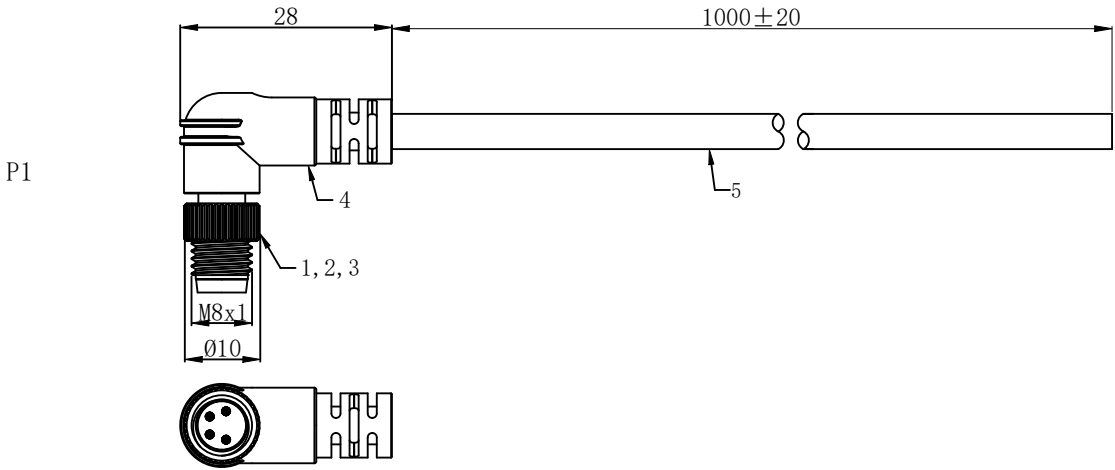

VIEW A


Wire List

P1	
PIN 1	brown
PIN 2	white
PIN 3	blue
PIN 4	black
Shell	Braid

General Specifications

Connector locking system:	Screw
Termination:	Solder
Temperature range:	-20°C ~ +80°C
Mating cycles:	> 100
Rated voltage:	50 V AC/ 60 V DC
Rated current:	3A
Contact resistance:	≤5 mΩ
Insulation resistance:	≥100 MΩ

5	Cable	UL2464 24AWG*4C+AL+Braid, Jacket:PVC Black	1
4	Molding	PVC Black	1
3	Screw Nut	M8*1.0 screw thread, brass with nickel plated	1
2	Contact	Brass, Male Pin,Gold Flash	4
1	Connector	M8 Male 4pin Connector	1
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 RENHOTECH GROUP					
	 PART DESCRIPTION: R/A M8 4P Male ,shielded					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm	Appd: JIM.KING	P/N: EB-400-8019				
	Check:	Date	Scale	Unit	Type	Page
	Draw: Ding	2025.02.14	Free	MM	Z	1/1