




REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2025/03/28	JIM. KING

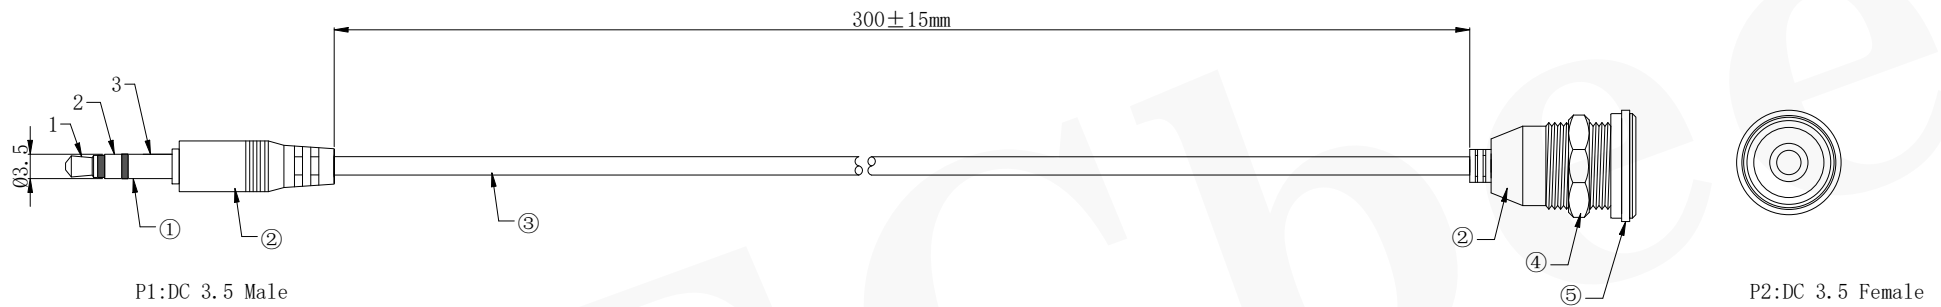

PIN OUT

P1	P2
1	1
2	2
3	Shell

5	Connector P2	3.5mm Female with nickle plated shell with nut	1
4	NUT	Black pvc molded	1
3	Cable	26AWG**2C+S Jacket:PVC Black, OD:3.0MM	1
2	Molding	PVC Black	2
1	Connector P1	3.5mm Male black pbt with nickle plated shell.	1
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 Buy From Original Factory www.elecbee.com	
	 	PART DESCRIPTION: 3.5 MALE TO DC 3.5 FEMALE FOR MOLDING CABLE
	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr: JIM. KING Check: Draw: Gavin
P/N: EB-104-0086		Date: 2025.03.28
		Scale: Free
		Unit: MM
		Type: Z
		Page: 1/1