





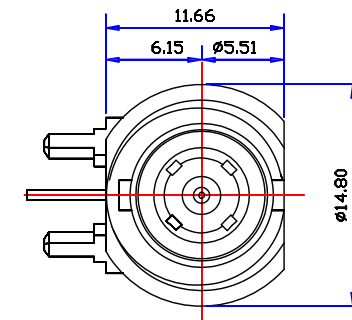


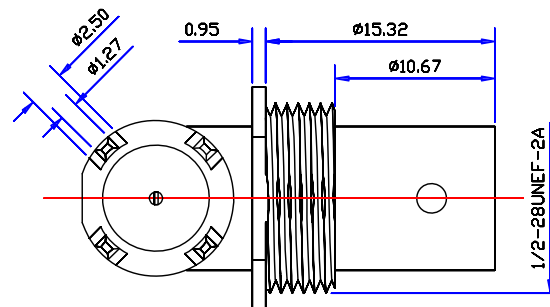

Product NO.		EB-001-0134-50ohm			
REV	DESCRIPTION	DWN	DATE	APPROVEN	
A	First issue	Gavin	2019/04/23	JIM. KING	

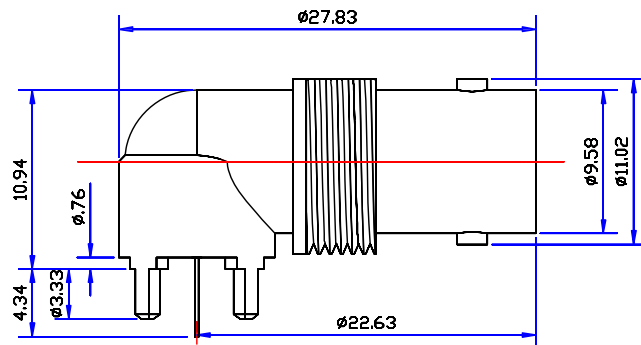

PCB HOLE CONFIGURATION
RECOMMENDED PANEL CUTOUTS

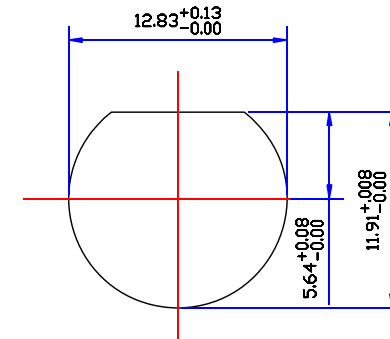

Specifications

Impedance:50 Ohms

Frequency Range:DC~6G

VSWR:1.5MAX

Working Voltage:500V rms @ sea level

Insulation Resistance:5000 Ohms min

Temperature Range:-55°C TO +155°C

Relative Temperature:≤95%(40° C±2° C)

Drawings products are in line with ROHS standards


3	CONTACT PLATING	BRASS	AU:1u"- 2u"	2
2	INSULATING	POM	WHITE	1
1	BODY	ZINC	NI:80u"-120u"	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mm



Elecbee Factory
www.elecbee.com



PART DESCRIPTION:
BNC CONNECTOR DNN

Appd: JIM. KING

P/N: EB-001-0134-50ohm

Check:

Date	Scale	Unit	Type	Page
------	-------	------	------	------

Draw: Gavin

2019. 04. 23	Free	MM	Z	1/1
--------------	------	----	---	-----