
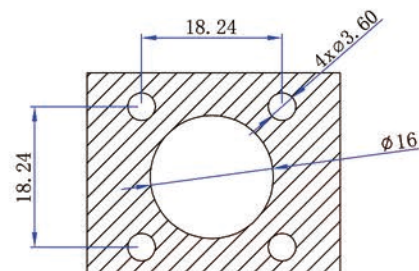
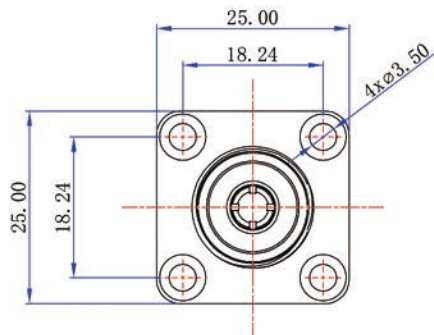


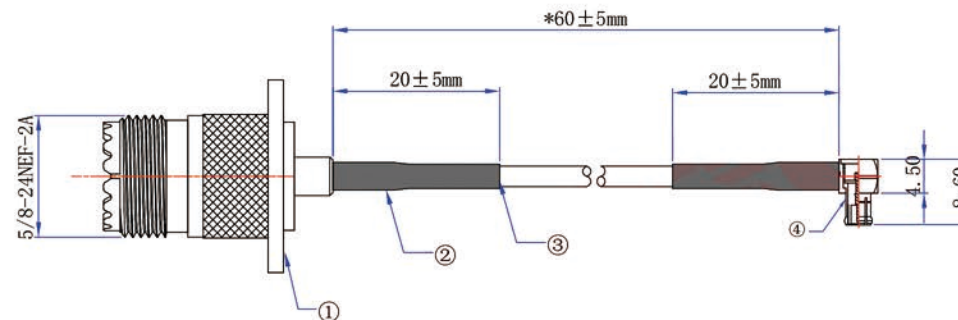

Product NO.

EB-101-1183-C

REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2023/09/14	JIM. KING

RECOMMENDED
MOUNTING HOLE**Specifications**

Impedance:50 Ohms

Frequency Range:DC~6

Voltage Rating:225 Volts RMS Max Continuous

Dielectric Withstanding Voltage:1000 VRMS Max

Insulation Resistance:10000 MΩ Min

Mating Cycles:500 Min

Temperature Range:-20°C TO +105°C

4	R/A MCX Plug	Brass, Gold plated	1
3	Cable	RG316, Jacket:FEP Brown, OD:2.5±0.2mm	1
2	heat shrink tubing	Black, L=20mm, ID:3.5mm	2
1	UNF Jack	Brass, Nickel plated	1
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mm



Buy From Original Factory
www.elecbee.com



PART DESCRIPTION:

UHF JACK TO R/A MCX PLUG FOR RG316 CABLE

Appd: JIM. KING

P/N: EB-101-1183-C

Check:

Date

Scale

Unit

Type

Page

Draw:

Gavin

2023.09.14

Free

MM

Z

1/1