



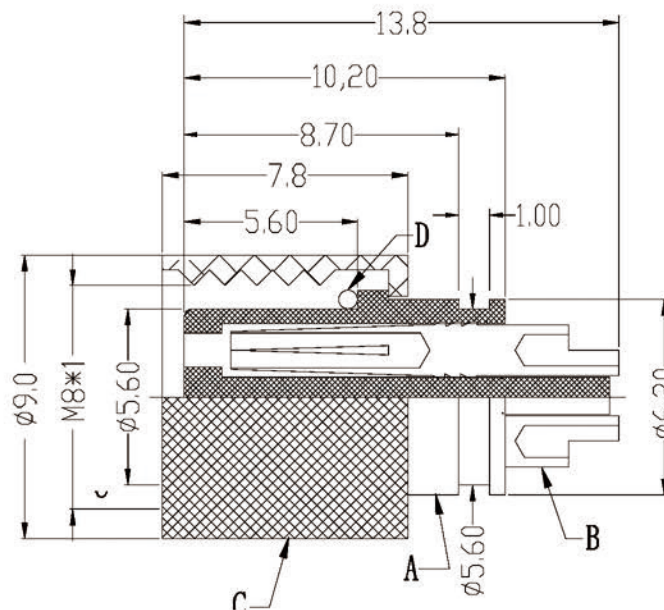

Product NO.		EB-400-1226			
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN	
R1.0	First issue	Ding	2021.06.29	JIM.KING	

M8 4P

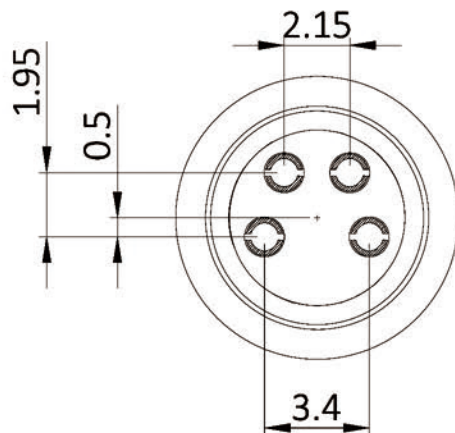

Specifications:

1. Ambient temperature: -25℃~+85℃
2. Mating endurance: >500cycles
3. Rated voltage: 50V DC/60V AC
4. Rated current: 3A
5. Contact resistance: $\leq 5\text{m}\Omega$
6. Insulation resistance: $\geq 100\text{M}\Omega$

D	O-ring	Rubber, red	1
C	Nut	Brass; Nickel plated	1
B	Housing	M8 3P/4P female A-Coding, PA66, Black	1
A	Pin	Brass; Gold-plated	3~4
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm 0.20\text{mm}$
8 - 30mm $\pm 0.25\text{mm}$
30 - 120mm $\pm 0.30\text{mm}$



Buy From Original Factory
www.elecbee.com



Appr: JIM.KING

Check:

Draw: DING

PART DESCRIPTION:

M8 4P Female A-Coding, Solder

P/N: EB-400-1226

Date	Scale	Unit	Type	Page
2021.06.29	Free	MM	Z	1/1