






REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024. 12. 10

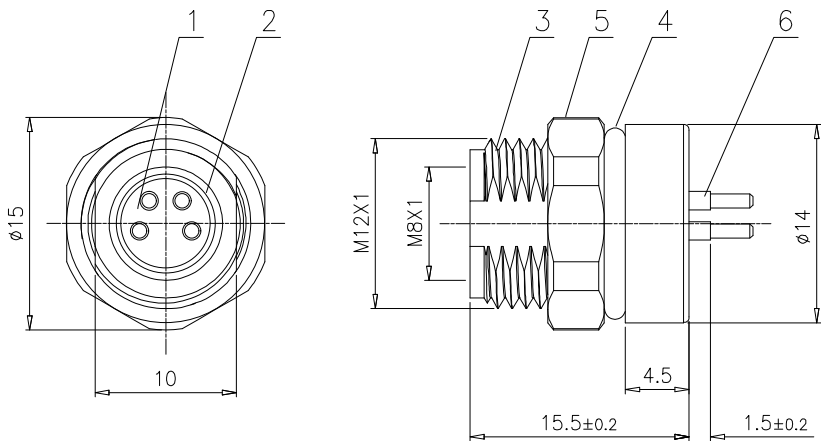


- NOTES:
- 1. Rated voltage/current:
 - 3P 60V/3A
 - 4P 60V/3A
 - 5P 30V/3A
 - 6P 30V/1.5A
 - 8P 30V/1.5A
 - 2. Withstanding voltage: AC850v/1minter
 - 3. Levels of protection: IP67
 - 4. Wire connection mode: Solder
 - 5. Operating temperature: -20℃~+85℃
 - 6. RoHS Compliance



Recommended
Panel Cutout



Pin Assingments



Recommended
Pcb Layout

6	Contacts	Brass	Gold Plated
5	Nut	Brass	Nickel Plated
4	O-Ring	Rubber	/
3	Body	Brass	Nickel Plated
2	O-Ring	Rubber	/
1	Insulator	PA66	Black
No.	Description	Material	Finish

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 -120mm ± 0.30mm

Buy From Original Factory
www.elecbee.com

PART NAME:
M8 4 Pin A Code Female PCB TYPE

Appr: Jim
Check: Jason
Draw: Riky

P/N: EB-400-1023

Date	Scale	Unit	Rev	Page
2024. 12. 10	1:1	MM	R1.0	1/1