





Product NO.

EB-400-1047

ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
RI.0	First issue	Gavin	2020/07/22	JIM. KING


NOTES:

- Rated voltage/current : 3pin: 60V/3A
4pin: 60V/3A
- Withstanding voltage : 3, 4pin: AC850V/1 Min
- Wire Range :
3pin: 24-22AWG/0.25~0.34mm²
4pin: 24-22AWG/0.25~0.34mm²
- Cable Range: 3.5~5.0mm
- Wire connection mode: Screw
- Operating temperature: -40°C ~+85°C
- RoHS Compliance

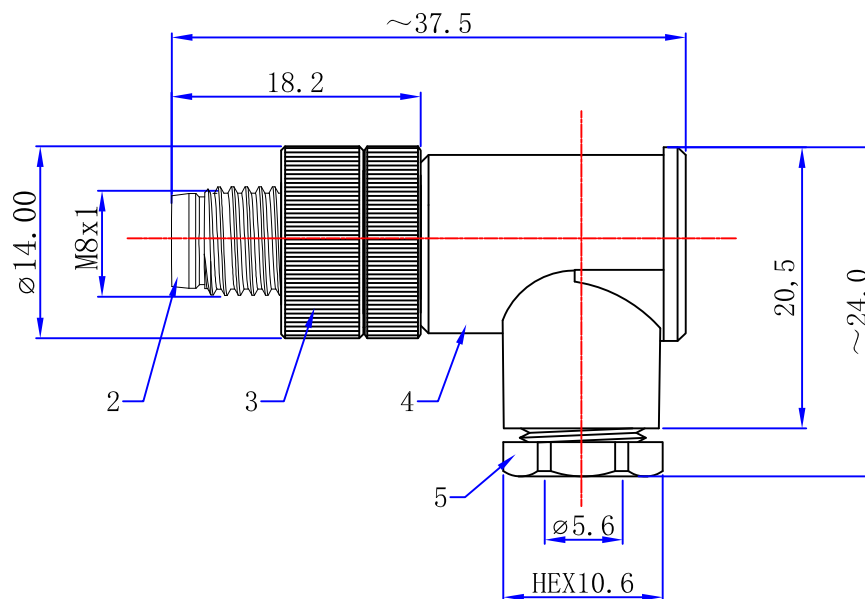

5	Plastic Nut	PA66	Black	1
4	Body	PA66	Black	1
3	Nut M8*1	Brass	Nickel	1
2	Insulator	PA66	Black	1
1	Contacts	Brass	Gold	3-4
NO	Description	Material	Finish	Qty

Pin Assingments Front View

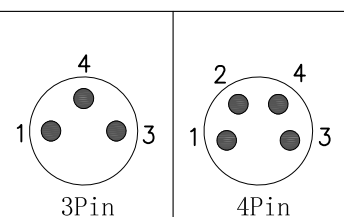

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED



Buy From Original Factory
www.elecbee.com

PART DESCRIPTION:
Circular Cable Connector, Male, M8, Angled

P/N: - EB-400-1047

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.20mm
30 - 120mm ± 0.30mm

Appr: JIM. KING

Check:

Draw: Gavin

Date	Scale	Unit	Type	Page
2020. 07. 22	Free	MM	Z	1/1