


REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024.12.10

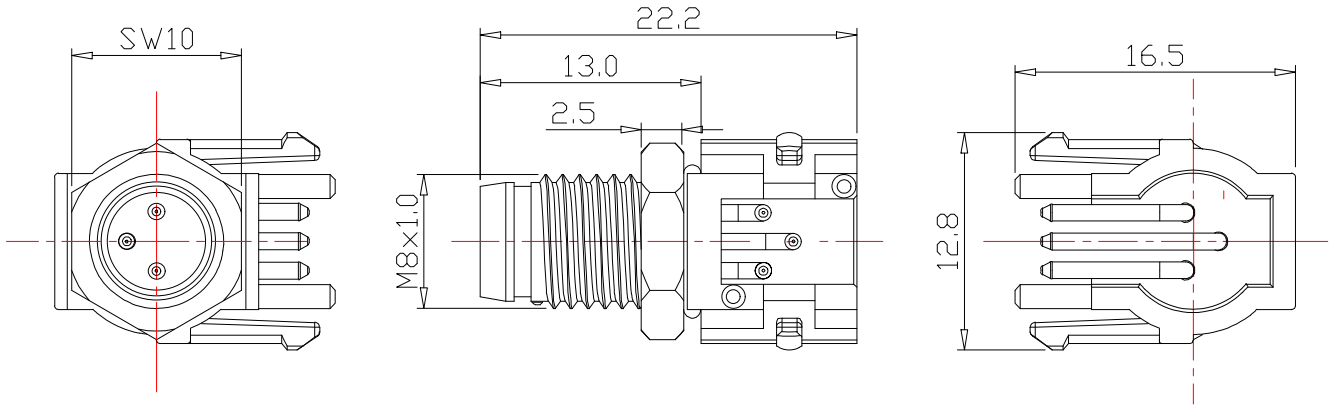

NOTES:
1.Rated voltage/current:
3P 60V/3A
4P 60V/3A
5P 30V/3A
6P 30V/1.5A
8P 30V/1.5A
2.Withstanding voltage: AC850v/1minter
3.Levels of protection:IP67
4.Wire connection mode:Solder
5.Operating temperature:−20℃~+85℃
6.RoHS Compliance



Recommended
Panel Cutout

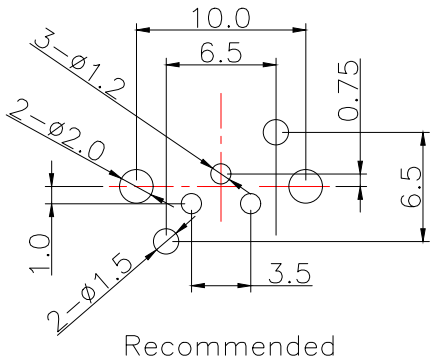

Recommended
Pcb Layout

No.	Description	Material	Finish
5	Contacts	Brass	Gold Plated
4	Nut	Brass	Nickel Plated
3	O-Ring	Rubber	/
2	Body	Brass	Nickel Plated
1	Insulator	PA66	Black

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 -120mm ± 0.30mm

Buy From Original Factory
www.elecbee.com

PART NAME: R/A M8 3P Male Connectors

Appr:	Jim	P/N: EB-400-1054				
Check:	Jason	Date	Scale	Unit	Rev	Page
Draw:	Riky	2024.12.10	1:1	MM	R1.0	1/1