

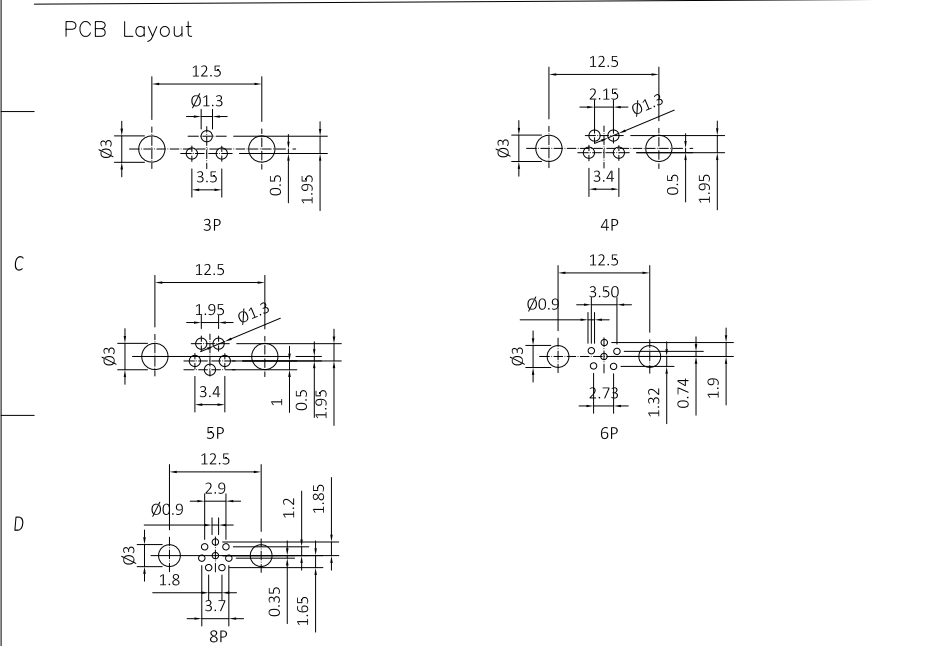
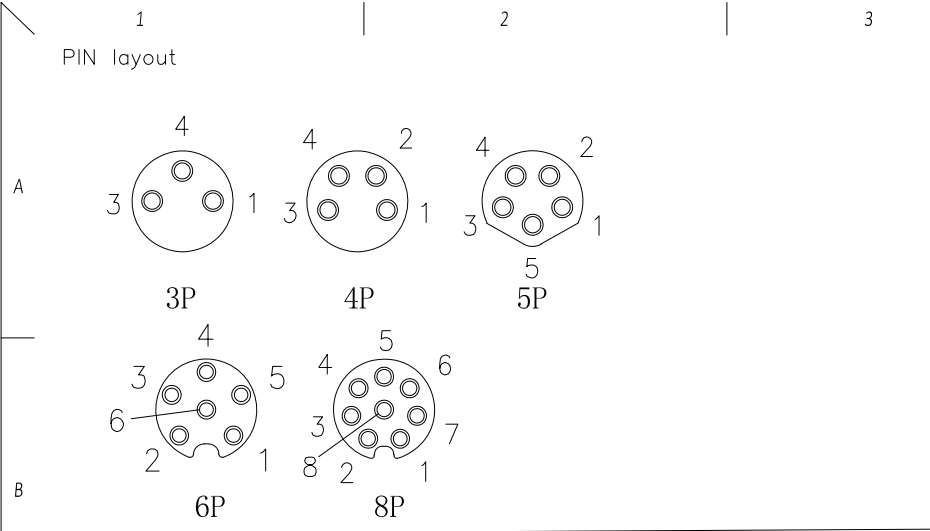


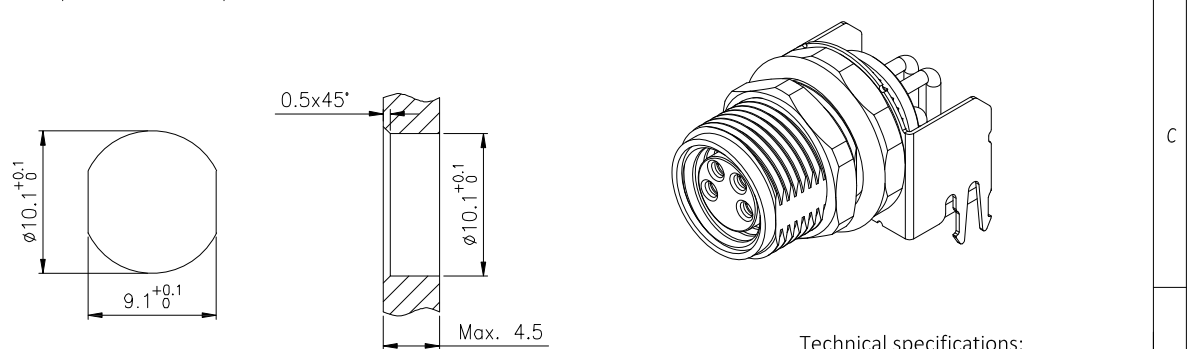


8	O-Ring	Rubber, green	1
7	Location-plate	PA66,Black	1
6	Contact	Brass; Gold-plated	3~8
5	Shielded	Brass; Gold-plated	1
4	O-Ring	Rubber, Black	1
3	Nut	Brass; Nickel plated	1
2	Body	M8 female Shell, Brass; Nickel plated	1
1	Housing	PA66,Black	1
No.	PART NAME	DESCRIPTION	Q'TY

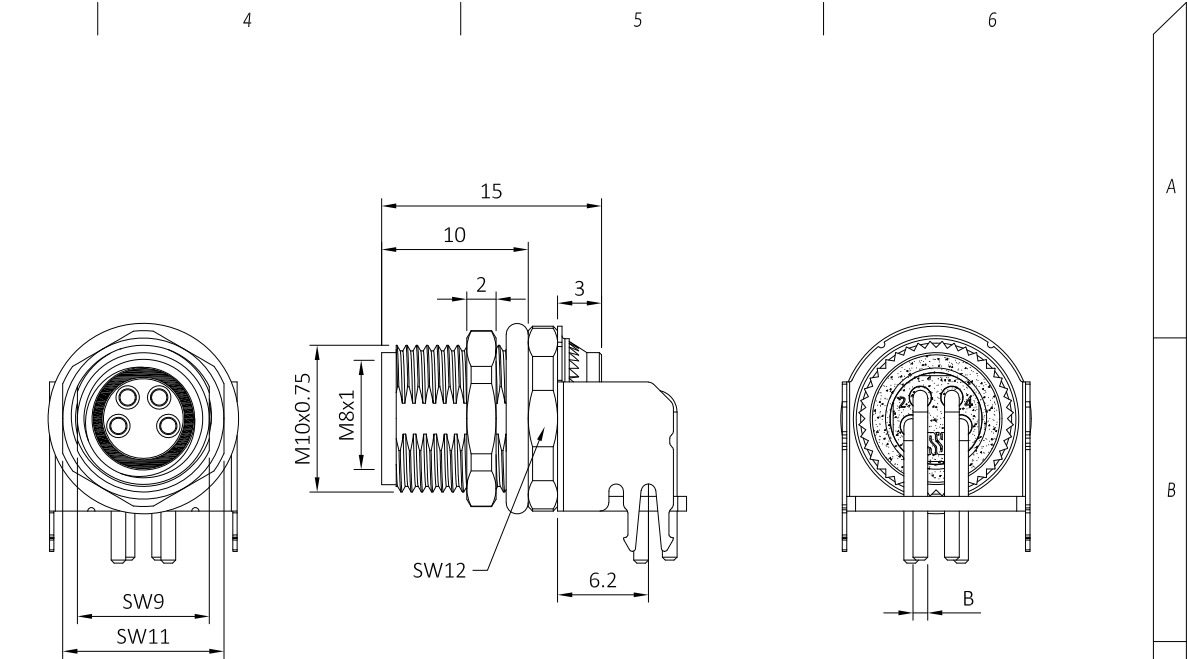

Recommended
Panel cut-out

B:
2~5P:Ø1mm
6~8P:Ø0.6mm

Technical specifications:
1.Rated voltage/current:
3/4pin:60V/3A
5pin:30V/3A
6/8pin:30V/1.5A
2.Degree of protection:IP67
3.Temperature range:-25°C~+80°C
4.Mating cycles:≥ 500

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 Buy From Original Factory www.elecbee.com					
	 PART DESCRIPTION: R/A M8 female Connector					
	Appr: JIM.KING P/N: EB-400-1055					
	Check:	Date	Scale	Unit	Type	Page
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Draw: DING	2023.05.05	Free	MM	Z	1/1