

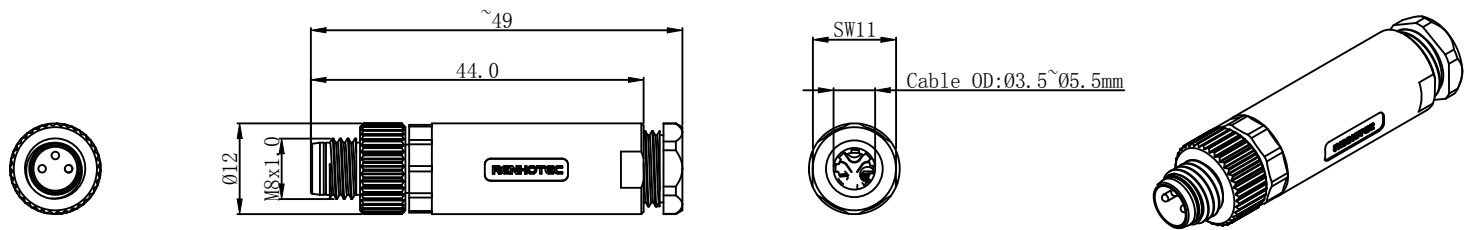



发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A / 0	First release	Ding	2023. 06. 02



Pin Assignment Front View	
	
3Pin	4Pin

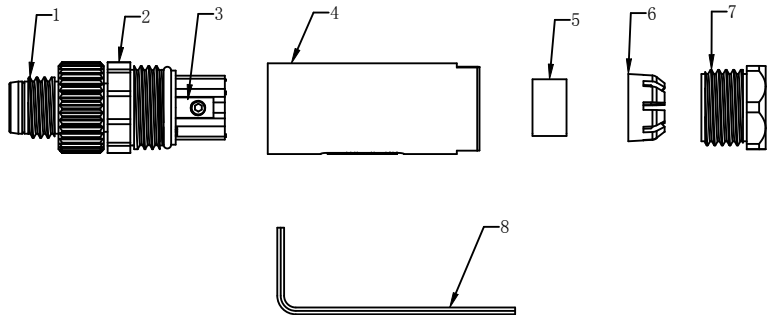

- NOTES:
- Rated voltage/current : 3pin: 60V/3A
4pin: 60V/3A
 - Wire Range :
3pin: 24~22AWG/0.25~0.34mm²
4pin: 24~22AWG/0.25~0.34mm²
 - Cable Range: Ø03.5~Ø5.5mm
 - Wire connection mode: Screw
 - Operating temperature: -40℃ ~+85℃
 - RoHS Compliance

8	Hex key	Carbon Steel	1	PCS
7	Pressure Screw	PA66 UL94-V0	1	PCS
6	Pinch ring	PA66 UL94-V0	1	PCS
5	Seal	NBR, Black	1	PCS
4	Body	PA66 UL94-V0	1	PCS
3	Contact	Brass with gold plated	3~4	PCS
2	Insert	PA66 UL94-V0	1	PCS
1	Screw	Brass with nickel plated	1	PCS
编号 No.	品名 Part Name	描述 Description	单位 Unit	用量 Qty

 Buy From Original Factory www.elecbee.com					
客户料号 Cus' P/N		图号 File No.	EB-400-1069	品名 Name	M8 Male connector Assembly, Screw joint
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	A/0
线性 Linear	0.5~6	±0.1	比例 Scale		图纸确认 DRAWING
	>6~30	±0.2			审核 Checked
角度 Angles		±3°	页码 Page	1/1	客户确认 Customer Approved