




Product NO.

EB-400-1073


ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
RI.0	First issue	Gavin	2020/04/07	JIM. KING

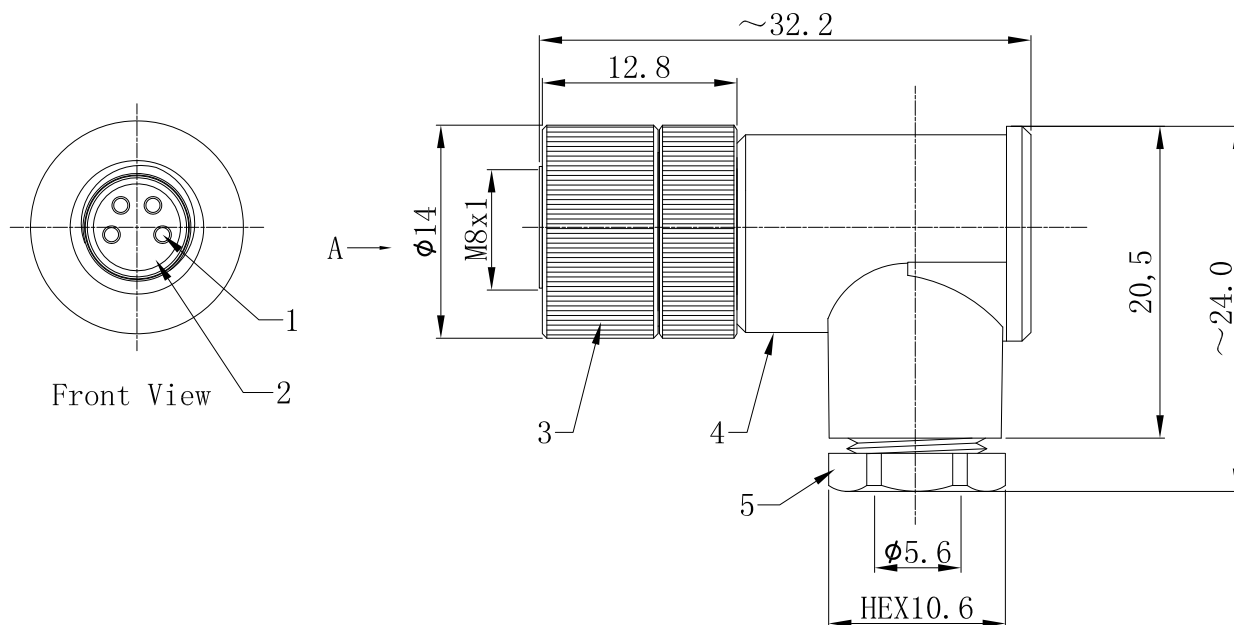


NOTES:

1. Rated voltage/current : 60V/3A
2. Withstanding voltage : 4AC850V/1 Min
3. Wire Range :
24-22AWG/0.25~0.34mm²
4. Cable Range:3.5~5.0mm
5. Wire connection mode: Screw
6. Operating temperature:-40℃ ~+85℃
7. RoHS Compliance

Pin Assignment Front View

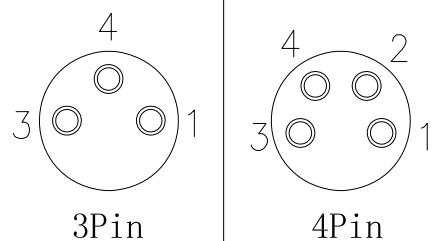

5	Plastic Nut	PA66	Black	1
4	Body	PA66	Black	1
3	Nut M8*1	Brass	Nickel	1
2	Insulator	PA66	Black	1
1	Contacts	Brass	Gold	3-4
NO	Description	Material	Finish	Qty

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIEDUNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mmBuy From Original Factory
www.elecbee.com

NAME:

R/A M8 Female Connector

Appr: JIM. KING

P/N:

EB-400-1073

Check:

Date

Scale

Unit

Type

Page

Draw:

Gavin

2020. 04. 07

Free

MM

Z

1/1