

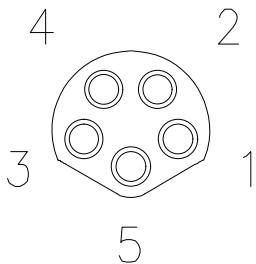


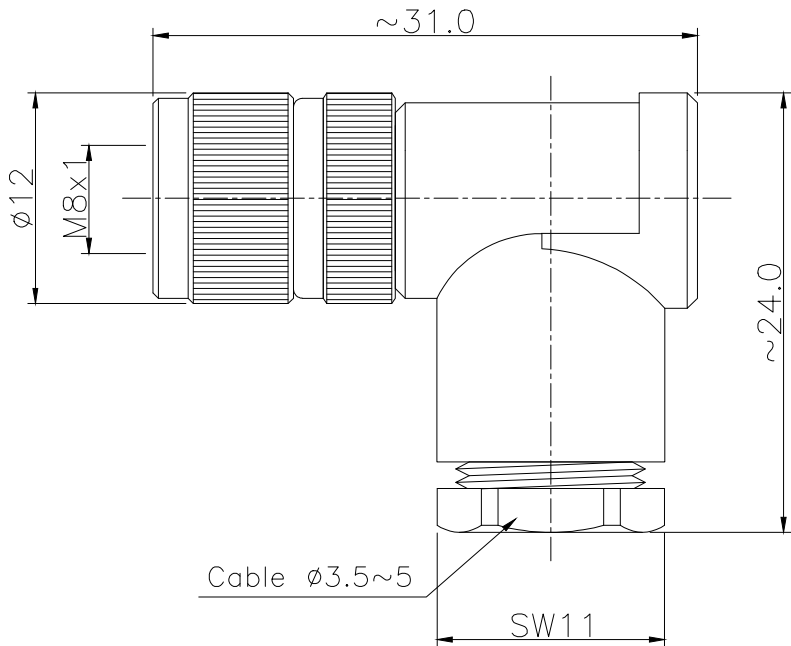

REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024. 12. 10



Pin Assingments

Specifications	
Connector locking system:	Screw
Termination:	Soldering
Temperature range:	-25°C ~ +80°C
Machenical mating:	> 100
Contact resistance:	≤5mΩ
Insulation resistance:	>100MΩ
Contact material:	CuZn gold plated over nickel
Insert material:	PA66+GF
Screw nut material:	CuZn nickel plated
Panel seal:	NBR

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 Buy From Original Factory www.elecbee.com					
	 		PART NAME: M8 FEMALE Connector 5 Pin B-Code Right Angle Solder Type			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm	Appr:	Jim	P/N: EB-400-1142			
	Check:	Jason	Date	Scale	Unit	Rev
	Draw:	Riky	2024. 12. 10	1:1	MM	R1.0
						Page
						1/1