



|                  |                     |               |              |
|------------------|---------------------|---------------|--------------|
| 发行版本<br>Revision | 修改内容<br>Description | 制图<br>Drawing | 日期<br>Date   |
| A / 0            | First release       | Ding          | 2023. 06. 02 |

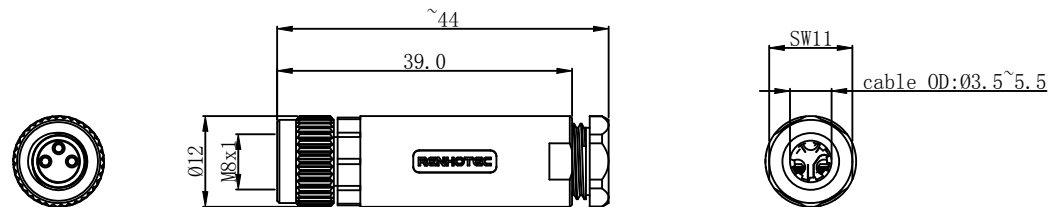

| Pin Assignment Front View |      |
|---------------------------|------|
|                           |      |
| 3Pin                      | 4Pin |

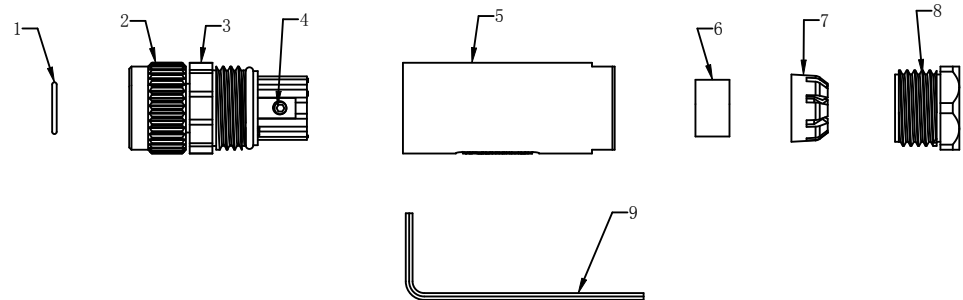

NOTES:  
1. Rated voltage/current : 3pin: 60V/3A  
4pin: 60V/3A  
2. Wire Range :  
3pin: 24-22AWG/0.25~0.34mm<sup>2</sup>  
4pin: 24-22AWG/0.25~0.34mm<sup>2</sup>  
3. Cable Range: ODØ3.5~Ø5.5mm  
4. Wire connection mode: Screw  
5. Operating temperature: -40℃ ~+85℃  
6. RoHS Compliance

|           |                 |                          |            |           |
|-----------|-----------------|--------------------------|------------|-----------|
| 9         | Hex key         | Carbon Steel             | 1          | PCS       |
| 8         | Pressure Screw  | PA66 UL94-V0             | 1          | PCS       |
| 7         | Pinch ring      | PA66 UL94-V0             | 1          | PCS       |
| 6         | Seal            | NBR, Black               | 1          | PCS       |
| 5         | Body            | PA66 UL94-V0             | 1          | PCS       |
| 4         | Contact         | Brass with gold plated   | 3-4        | PCS       |
| 3         | Insert          | PA66 UL94-V0             | 1          | PCS       |
| 2         | Screw           | Brass with nickel plated | 1          | PCS       |
| 1         | O-ring          | NBR, Black               | 1          | PCS       |
| 编号<br>No. | 品名<br>Part Name | 描述<br>Description        | 单位<br>Unit | 用量<br>Qty |

|                                                                                                                                                          |  |       |      |                 |       |                                                                                       |                        |                           |      |                                              |            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------|------|-----------------|-------|---------------------------------------------------------------------------------------|------------------------|---------------------------|------|----------------------------------------------|------------|
| <div><div>Buy From Original Factory<br/>www.elecbee.com</div></div> |  |       |      |                 |       |                                                                                       |                        |                           |      |                                              |            |
| 客户料号<br>Cus' P/N                                                                                                                                         |  |       |      | 图 号<br>File No. |       | EB-400-1169                                                                           |                        | 品 名<br>Name               |      | M8 Female connector<br>Assembly, Screw joint |            |
| 未注公差<br>Unless Otherwise Specified                                                                                                                       |  |       |      | 单 位<br>Unit     | mm    | 版 本<br>Revision                                                                       | A/0                    | 图纸确认 APPROVAL             |      | 日期 Date                                      |            |
| 线性<br>Linear                                                                                                                                             |  | 0.5~6 | ±0.1 | 比 例<br>Scale    | —     |  | Third Angle Projection | 绘 图<br>Drawing            | Ding |                                              | 2023.06.02 |
|                                                                                                                                                          |  | >6~30 | ±0.2 |                 |       |                                                                                       |                        | 审 核<br>Checked            | Jim  |                                              | 2023.06.02 |
|                                                                                                                                                          |  | >30   | ±2%  |                 |       |                                                                                       |                        |                           |      |                                              |            |
| 角度 Angles                                                                                                                                                |  | ±3°   |      | 页 码<br>Page     | 1 / 1 |                                                                                       |                        | 客户确认<br>Customer Approved |      |                                              |            |