






Product NO.

EB-400-1174

ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
RI.0	First issue	Gavin	2019/12/17	JIM.KING

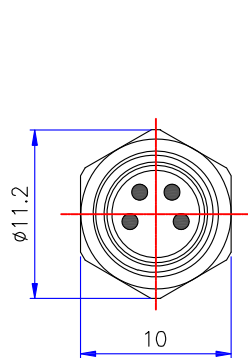


Front View

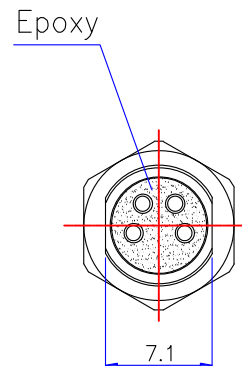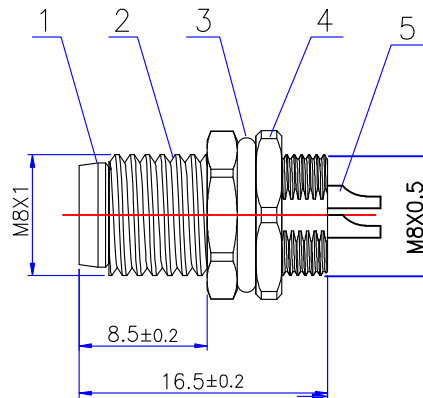


Rear View

NOTES:


- Rated voltage/current: 3pin: 60V/3A
4pin: 60V/3A
5pin: 60V/3A
6, 8pin: 30V/1A
- Withstanding voltage: 3, 4pin: AC850V/1 Min
5, 6, 8pin: AC650V/1 Min
- Levels of protection: IP67
- Connection mode: Soldering
- Operating temperature: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- RoHS Compliance

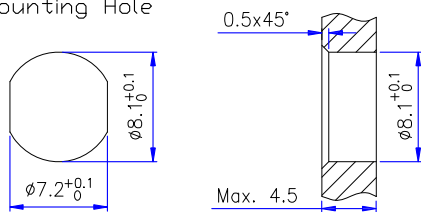Recommended
Mounting Hole

Pin height

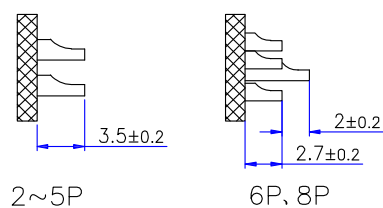

Pin Assignments Front View

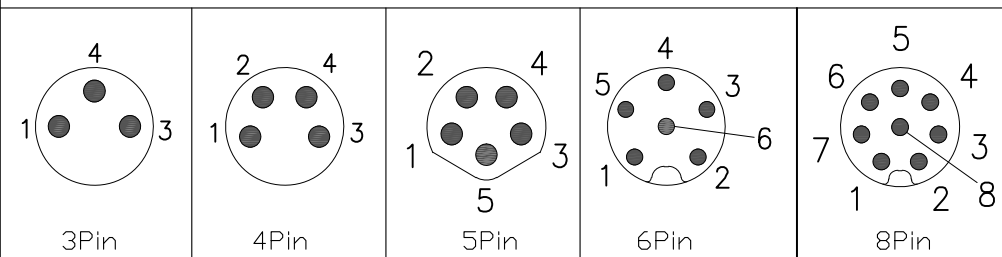

5	Contacts	Brass	Gold	3-8
4	Nut M8*0.5	Brass	Nickel	1
3	O-Ring	Rubber		1
2	Body	Brass	Nickel	1
1	Insulator	PA66	Black	1
NO	Description	Material	Finish	Qty

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIEDUNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm 0.20\text{mm}$
8 - 30mm $\pm 0.25\text{mm}$
30 - 120mm $\pm 0.30\text{mm}$ Buy From Original Factory
www.elecbee.com

PART DESCRIPTION:

Circular Panel Mount, Male, M8, Back Mount, DIP

Appr: JIM.KING

P/N: EB-400-1174

Check:

Date

Scale

Unit

Type

Page

Draw:

Gavin

2019. 12. 17

Free

MM

Z

1/1