



发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
A / 0	First release	Ding	2023. 06. 02

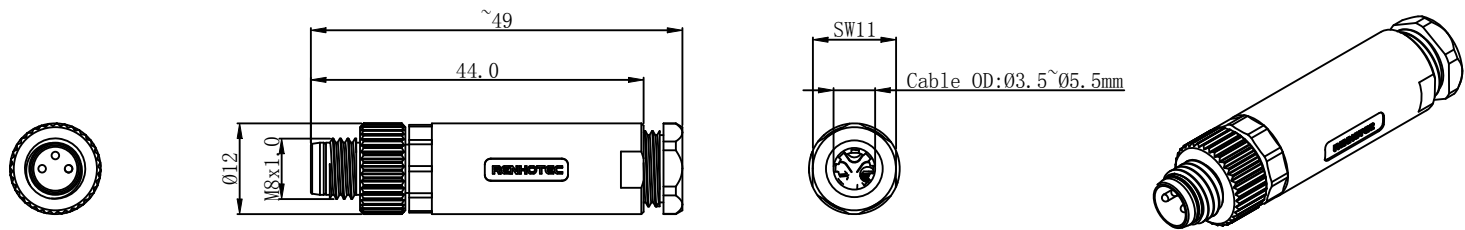


Pin Assignment Front View	
3Pin	4Pin

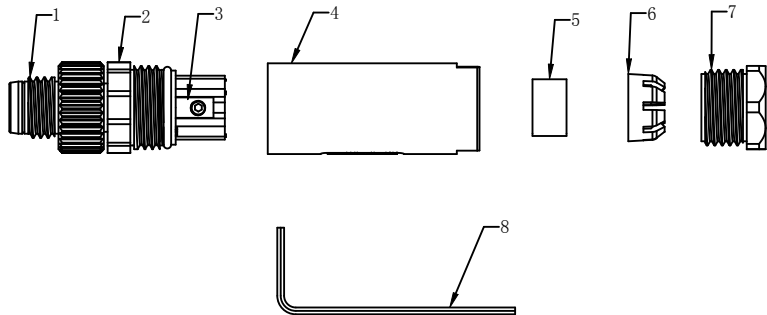

- NOTES:
- Rated voltage/current : 3pin: 60V/3A
4pin: 60V/3A
 - Wire Range :
3pin: 24~22AWG/0.25~0.34mm²
4pin: 24~22AWG/0.25~0.34mm²
 - Cable Range:OD03.5~05.5mm
 - Wire connection mode: Screw
 - Operating temperature:-40℃ ~+85℃
 - RoHS Compliance

8	Hex key	Carbon Steel	1	PCS
7	Pressure Screw	PA66 UL94-V0	1	PCS
6	Pinch ring	PA66 UL94-V0	1	PCS
5	Seal	NBR, Black	1	PCS
4	Body	PA66 UL94-V0	1	PCS
3	Contact	Brass with gold plated	3~4	PCS
2	Insert	PA66 UL94-V0	1	PCS
1	Screw	Brass with nickel plated	1	PCS
编号 No.	品名 Part Name	描述 Description	单位 Unit	用量 Qty

 Buy From Original Factory www.elecbee.com											
客户料号 Cus' P/N				图 号 File No.		EB-400-1178		品 名 Name		M8 Male connector Assembly, Screw joint	
未注公差 Unless Otherwise Specified				单 位 Unit	mm	版 本 Revision	A/0	图纸确认 APPROVAL		日期 Date	
线性 Linear		0.5~6	±0.1	比例 Scale	—		Third Angle Projection	绘 图 Drawing	Ding	2023.06.02	
		>6~30	±0.2					审 核 Checked	Jim	2023.06.02	
		角度 Angles		±3°				页 码 Page	1 / 1	客户确认 Customer Approved	