



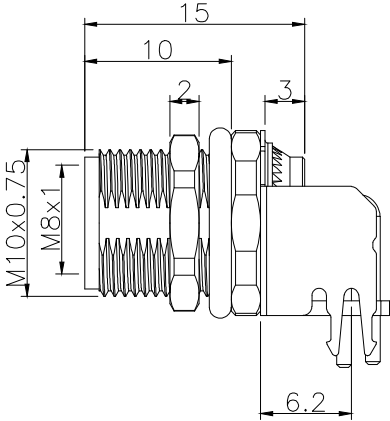


REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024. 12. 10




- NOTES:
- Rated voltage/current:
3P 60V/3A
4P 60V/3A
5P 30V/3A
6P 30V/1.5A
8P 30V/1.5A
 - Withstanding voltage: AC850v/1minter
 - Levels of protection:IP67
 - Wire connection mode:Solder
 - Operating temperature:−20℃~+85℃
 - RoHS Compliance


8	O-Ring	Rubber	/
7	Location-plate	PA66	Black
6	Contacts	Brass	Gold Plated
5	Shielded	Brass	Gold Plated
4	O-Ring	Rubber	/
3	Nut	Brass	Nickel Plated
2	Body	Brass	Nickel Plated
1	Insulator	PA66	Black
No.	Description	Material	Finish

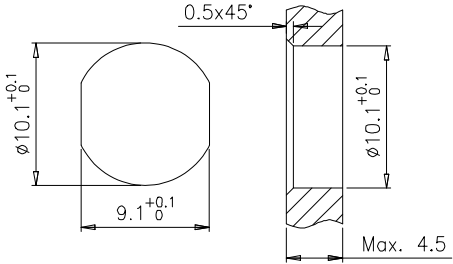


Recommended
Panel Cutout



Pin Assingments

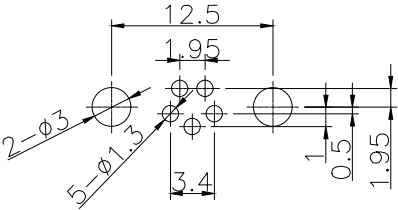

Recommended
Pcb Layout

-TOLERANCES- UNLESS OTHERWISE SPECIFIED			Buy From Original Factory www.elecbee.com				
			PART NAME: R/A M8 5Pin B Code Female Connector				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm	Appr: Jim		P/N: EB-400-1201				
	Check: Jason		Date	Scale	Unit	Rev	Page
	Draw: Riky		2024. 12. 10	1:1	MM	R1.0	1/1