


PIN layout

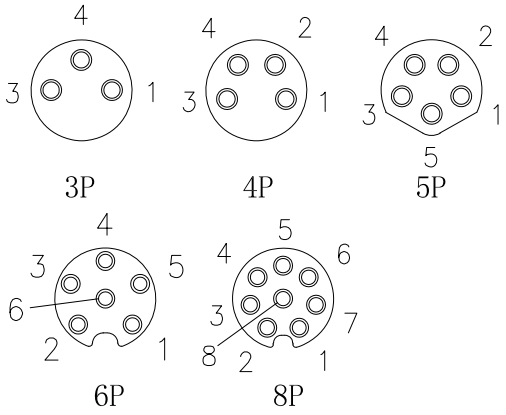

PCB Layout

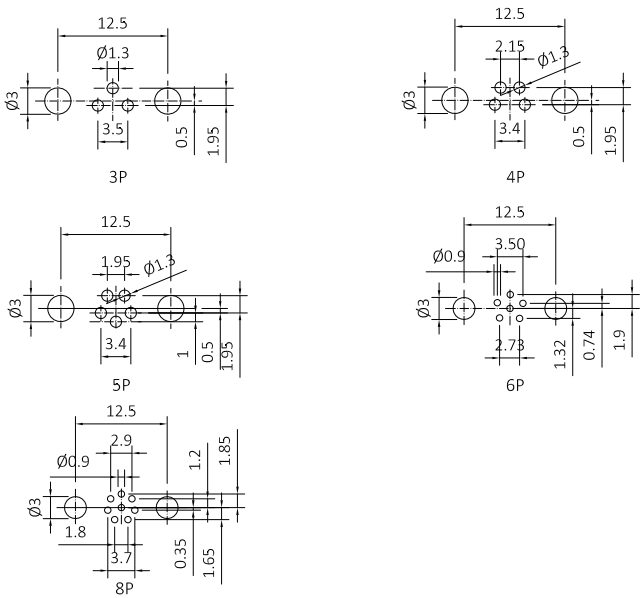

No.	PART NAME	DESCRIPTION	Q'TY
8	O-Ring	Rubber, green	1
7	Location-plate	PA66,Black	1
6	Contact	Brass; Gold-plated	3~8
5	Shielded	Brass; Gold-plated	1
4	O-Ring	Rubber, Black	1
3	Nut	Brass; Nickel plated	1
2	Body	M8 female Shell, Brass; Nickel plated	1
1	Housing	PA66,Black	1

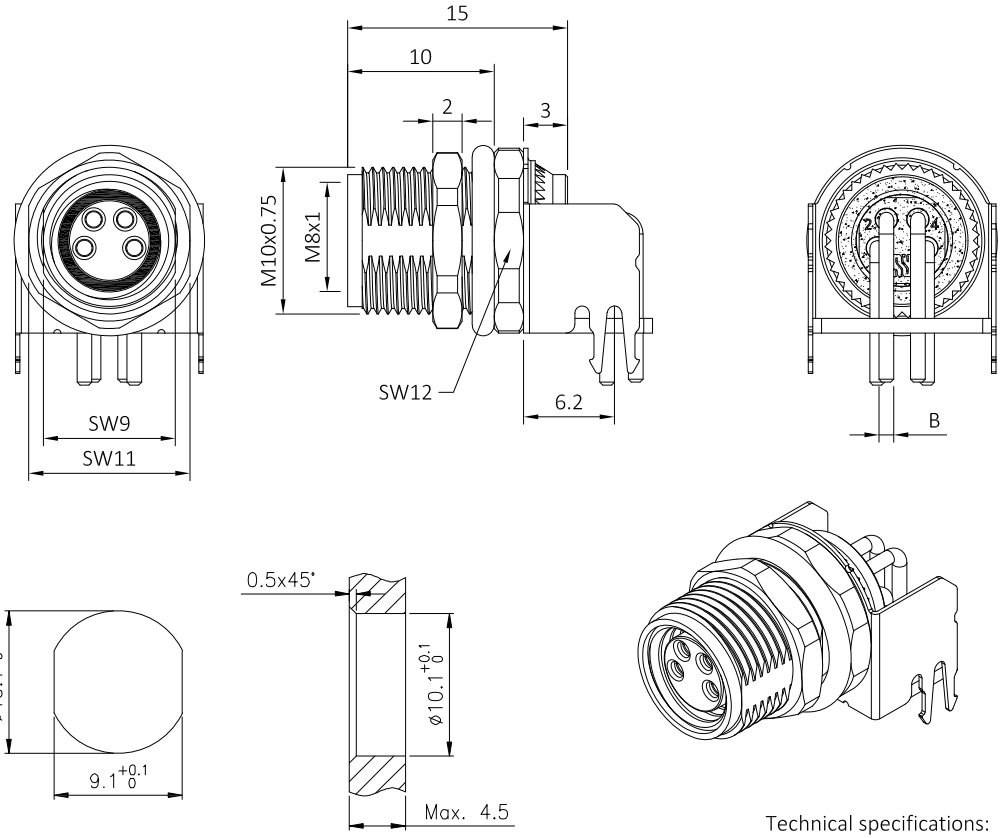

Recommanded
Panel cut-out

B:
2～5P:Φ1mm
6～8P:Φ0.6mm

Technical specifications:
1.Rated voltage/current:
3/4pin:60V/3A
5pin:30V/3A
6/8pin:30V/1.5A
2.Degree of protection:IP67
3.Temperature range:-25°C~+80°C
4.Mating cycles:≥500

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 -120mm ± 0.30mm

Buy From Original Factory
www.elecbee.com

PART DESCRIPTION: R/A M8 female Connector

Appr: JIM.KING	P/N: EB-400-1203				
Check:	Date	Scale	Unit	Type	Page
Draw: DING	2023.05.05	Free	MM	Z	1/1