







REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024. 12. 10




Front View

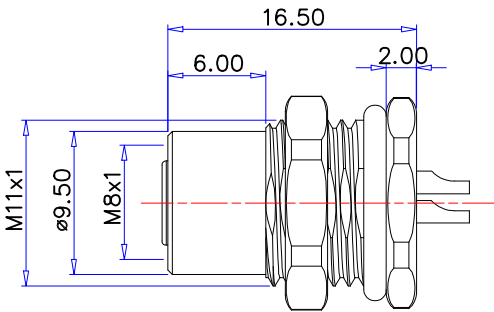

Rear View



Recommended Mounting Hole



Pin Assignments

- NOTES:
- Rated voltage/current:
3P 60V/3A
4P 60V/3A
5P 30V/3A
6P 30V/1.5A
8P 30V/1.5A
 - Withstanding voltage: AC850v/1minter
 - Levels of protection:IP67
 - Wire connection mode:Solder
 - Operating temperature:−20℃~+85℃
 - RoHS Compliance

6	Contacts	Brass	Gold Plated
5	Nut	Brass	Nickel Plated
4	O-Ring	Rubber	/
3	Body	Brass	Nickel Plated
2	O-Ring	Rubber	/
1	Insulator	PA66	Blue
No.	Description	Material	Finish

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		 Buy From Original Factory www.elecbee.com					
		PART NAME: M8 4 Pin Female Panel Mount					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm		Appr: Jim	P/N: EB-400-1211				
		Check: Jason	Date	Scale	Unit	Rev	Page
		Draw: Riky	2024. 12. 10	1:1	MM	R1.0	1/1