






REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024. 12. 10

- NOTES:
- Rated voltage/current:
3P 60V/3A
4P 60V/3A
5P 30V/3A
6P 30V/1.5A
8P 30V/1.5A
 - Withstanding voltage: AC850v/1minter
 - Levels of protection:IP67
 - Wire connection mode:Solder
 - Operating temperature:−20℃~+85℃
 - RoHS Compliance

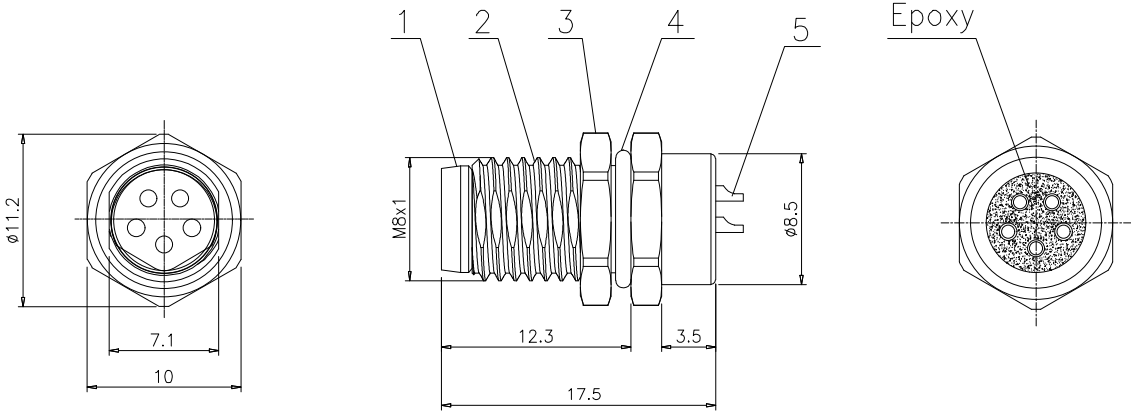

Recommended
Mounting Hole



Pin Assingments

5	Contacts	Brass	Gold Plated
4	O-Ring	Rubber	/
3	Nut	Brass	Nickel Plated
2	Body	Brass	Nickel Plated
1	Insulator	PA66	Black
No.	Description	Material	Finish

–TOLERANCES–
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.25mm
30 –120mm ± 0.30mm

Buy From Original Factory
www.elecbee.com

PART NAME:
M8 5 Pin B Code Male Panel Mount

P/N:
EB-400-1216

Appr: Jim

Check: Jason

Draw: Riky

Date

2024. 12. 10

Scale

1:1

Unit

MM

Rev

R1.0

Page

1/1