






Product NO.

EB-400-1218

ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
RI.0	First issue	Gavin	2019/12/17	JIM.KING

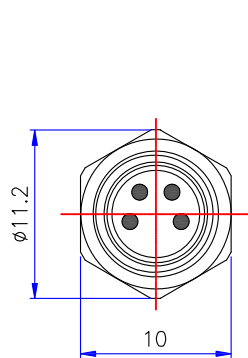


Front View

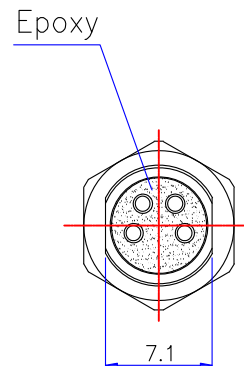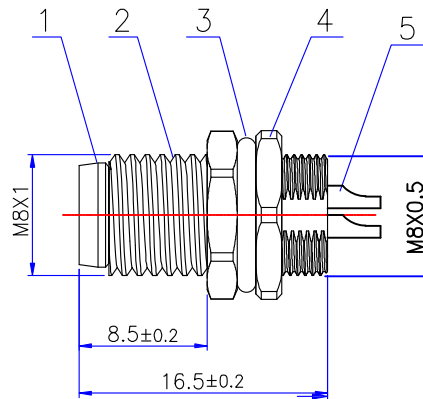


Rear View

NOTES:


- Rated voltage/current: 3pin: 60V/3A
4pin: 60V/3A
5pin: 60V/3A
6, 8pin: 30V/1A
- Withstanding voltage: 3, 4pin: AC850V/1 Min
5, 6, 8pin: AC650V/1 Min
- Levels of protection: IP67
- Connection mode: Soldering
- Operating temperature: -20°C ~+85°C
- RoHS Compliance

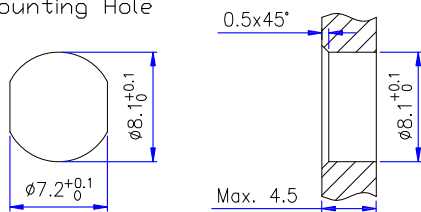Recommended
Mounting Hole

Pin height

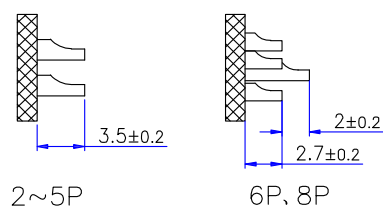

Pin Assignments Front View

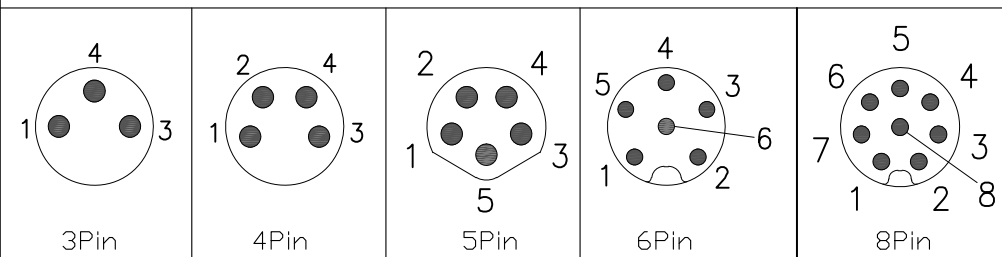

5	Contacts	Brass	Gold	3-8
4	Nut M8*0.5	Brass	Nickel	1
3	O-Ring	Rubber		1
2	Body	Brass	Nickel	1
1	Insulator	PA66	Black	1
NO	Description	Material	Finish	Qty

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIEDUNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mmBuy From Original Factory
www.elecbee.comPART DESCRIPTION:
Circular Panel Mount, Male, M8, Back Mount, DIP

Appr: JIM.KING

P/N: EB-400-1218

Check:

Date Scale Unit Type Page

Draw:

Gavin

2019. 12. 17

Free

MM

Z

1/1