

REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024.12.10

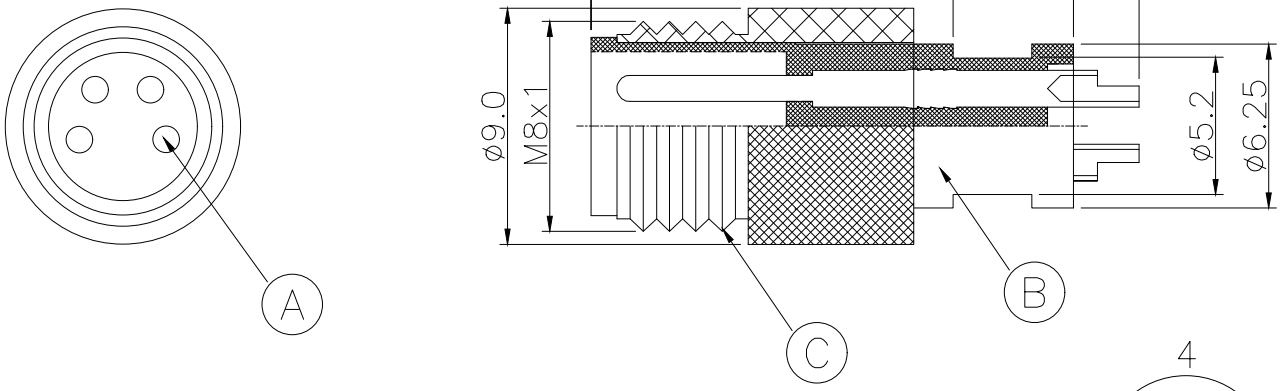

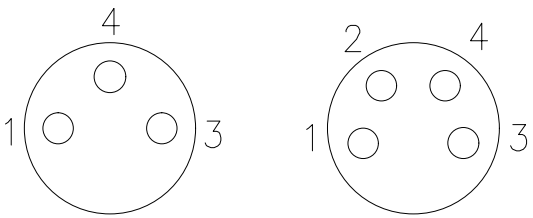

3 Pin　　4 Pin

Pin Assignments

Specifications
1.Temperature range: −25°C ~ +80°C
2.Machenical mating: > 500
3.Rated voltage: 50V DC/60V AC
4.Rated Current: 3A
5.Contact resistance: ⩽5mΩ
6.Insulation resistance: ⩾100MΩ

No.	PART NAME	Material	Finish
C	Nut	Brass	Nickel Plated
B	Housing	PA66	Black
A	PIN	Brass	Gold Plated

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 -120mm ± 0.30mm

Buy From Original Factory
www.elecbee.com

PART NAME: M8 Connector 4pin Male Straight Injection Molding Connector Solder Cup Unshielded

Appr:	Jim	P/N:	EB-400-1225			
Check:	Jason	Date	Scale	Unit	Rev	Page
Draw:	Riky	2024.12.10	1:1	MM	R1.0	1/1