



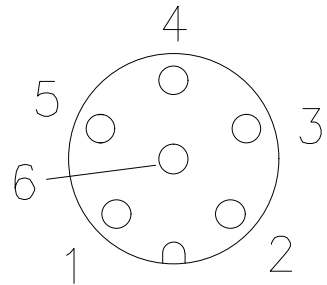

REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024. 12. 10

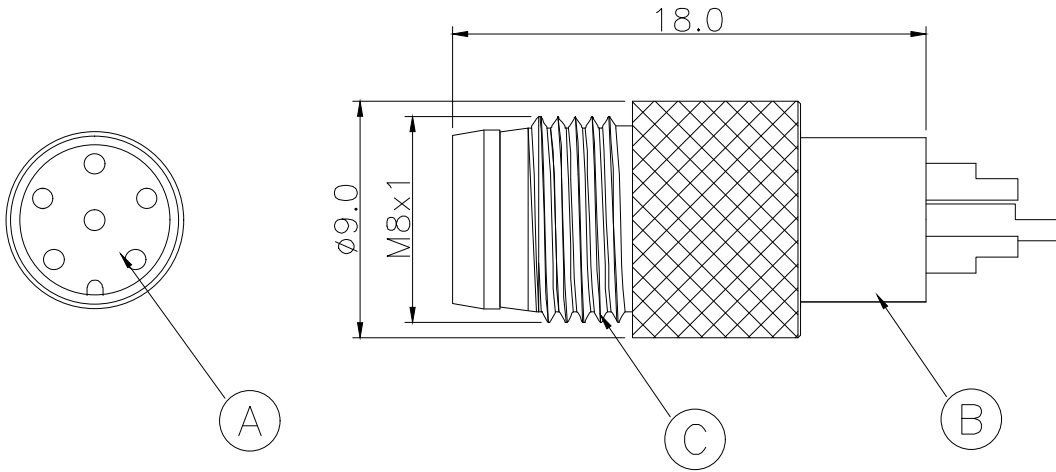

Pin Assingnmnts

Specifications

- 1.Temperature range: $-25^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 2.Machenical mating: > 100
- 3.Rated voltage: 30V DC/AC
- 4.Rated Current: 1.5A
- 5.Contact resistance: $\leq 5\text{m}\Omega$
- 6.Insulation resistance: $\geq 100\text{M}\Omega$


C	Nut	Brass	Nickel Plated
B	Housing	PA66	Black
A	PIN	Brass	Gold Plated
No.	PART NAME	Material	Finish

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.25mm
30 -120mm $\pm$ 0.30mm



Buy From Original Factory
www.elecbee.com



PART NAME: M8 Connector 6pin Male Straight Injection
Molding Connector Solder Cup Unshielded

Appr: Jim

Check: Jason

Draw: Riky

P/N: EB-400-1230

Date: 2024. 12. 10

Scale: 1:1

Unit: MM

Rev: R1.0

Page: 1/1