



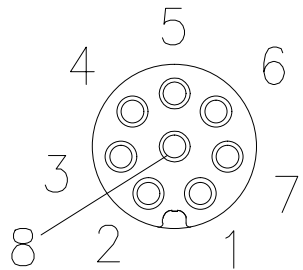

REV	DESCRIPTION	DRAWING	DATE
R1.0	First issue	Riky	2024. 12. 10

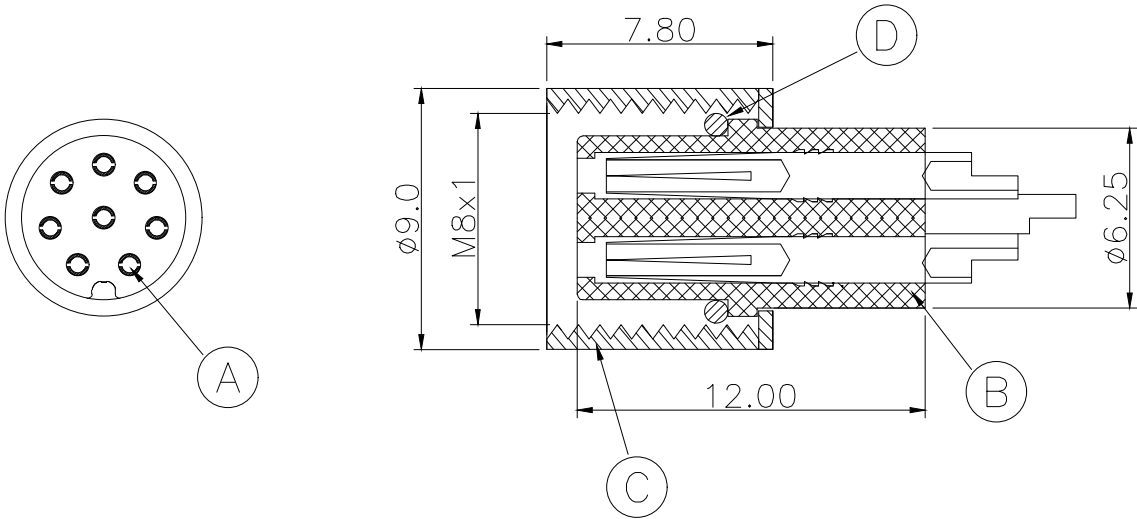

Pin Assignments

Specifications

1.Temperature range: $-25^{\circ}\text{C} \sim +80^{\circ}\text{C}$

2.Machenical mating: > 500

3.Rated voltage: 30V DC/AC

4.Rated Current: 1.5A

5.Contact resistance: $\leq 5\text{m}\Omega$

6.Insulation resistance: $\geq 100\text{M}\Omega$

D	O-ring	Rubber	
C	Nut	Brass	Nickel Plated
B	Housing	PA66	Black
A	PIN	Brass	Gold Plated
No.	PART NAME	Material	Finish

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		 Buy From Original Factory www.elecbee.com				
		PART NAME: M8 Connector 8pin Female Straight Injection Molding Connector Solder Cup Unshielded				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm $\pm 0.20\text{mm}$ 8 - 30mm $\pm 0.25\text{mm}$ 30 -120mm $\pm 0.30\text{mm}$		Appr: Jim	P/N: EB-400-1233			
		Check: Jason	Date	Scale	Unit	Rev
		Draw: Riky	2024. 12. 10	1:1	MM	R1.0
						Page
						1/1