


200 KHz to 110 GHz 1.0mm Bias Tee Rated to 300 mA And 25 Volts DC P/N: EB-GBT-200K110G-10



Dimensions are in mm

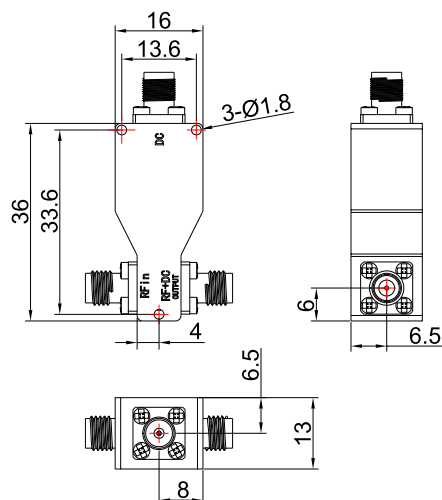

Product Configuration

DC Port Connector Series	SMA Female
Connector-In Series	1.0mm
Connector-In Polarity	Standard
Connector-In Gender	Female
Connector-In Impedance (Ohm)	50
Connector-Out Series	1.0mm
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50

Electrical Specifications

Frequency Range	200KHz to 110GHz
VSWR / Return Loss	-8dB
Insertion Loss	4dB
Power, Max Input (Watts)	1
Voltage, DC Max (Volts)	+25
Current, Max (mA)	300
RF to Bias Isolation, Max (dB)	30

200 KHz to 110 GHz 1.0mm Bias Tee Rated to 300 mA And 25 Volts DC P/N: EB-GBT-200K110G-10

Mechanical Data

Min. Mating Cycles	≥500
--------------------	------

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-25°C to +55°C