


DC Block on Inner Conductor 2.4mm Male to 2.4mm Female Operating P/N: EB5-GDCB-50G-24E
from 10 MHz to 50 GHz



Dimensions are in mm

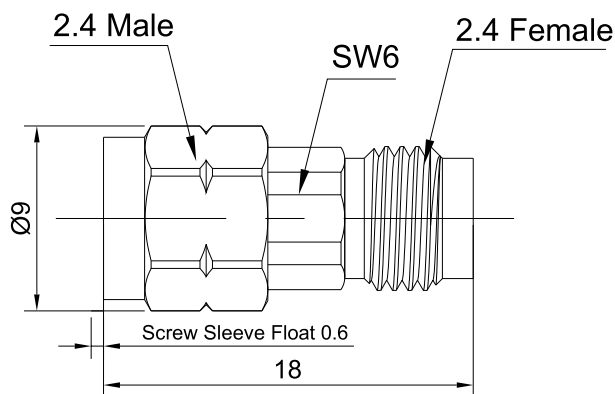

Product Configuration

Connector-In Series	2.4mm
Connector-In Polarity	Standard
Connector-In Gender	Male
Connector-In Impedance (Ohm)	50
Connector-Out Series	2.4mm
Connector-Out Polarity	Standard
Connector-Out Gender	Female
Connector-Out Impedance (Ohm)	50
Block Type	Inner

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Stainless Steel
Body Plating	Passivated
Connector In Body Material	Stainless Steel
Connector In Body Plating	Passivated
Connector Out Body Material	Stainless Steel
Connector Out Body Plating	Passivated

**DC Block on Inner Conductor 2.4mm Male to 2.4mm Female Operating P/N: EB5-GDCB-50G-24E
from 10 MHz to 50 GHz**

Electrical Specifications

VSWR / Return Loss	<1.4
Insertion Loss	≤0.6dB
Frequency Range	10MHz-50GHz
Voltage, DC Max (Volts)	+50

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +100 °C